

BEFORE THE HON'BLE NATIONAL GREEN TRIBUNAL PRINCIPAL  
BENCH, NEW DELHI

Execution Application No. 34/2023

IN

Original Application No. 526/2019

Mahesh Chandra Saxena

Applicant

Versus

Central Pollution Control Board &amp; Anr.

Respondent(s)

## INDEX

|    |   |       |
|----|---|-------|
| 1. | Fresh Report on behalf of CGWA  | 1-3   |
| 2. | Annexure-I<br>Joint Committee Report constituted by<br>M.O.J&S  | 4-17  |
| 3. | Annexure-II<br>Copy of CGWA Letter dt.31.03.23 to various<br>states to prevent the contamination of the<br>Ground Water by RWHS | 18-21 |
| 4. | Annexure-III<br>Copy of Advisory issued by M.O.J.&S.  | 22-27 |
| 5. | Annexure-IV<br>Copy of SOP issued by M.O.J.&S.  | 28-44 |

Filed By



GIGI.C.GEORGE

ADVOCATE

STANDING COUNSEL (UOI)  
CH.NO.457, LAWYERS BLOCK-I

DELHI HIGH COURT, N.D.

Email:gigicgeorge.adv42@yahoo.in  
M-98106253215

BEFORE THE HON'BLE NATIONAL GREEN TRIBUNAL PRINCIPAL  
BENCH, NEW DELHI

Execution Application No. 34/2023

IN

Original Application No. 526/2019

Mahesh Chandra Saxena

Applicant

Versus

Central Pollution Control Board &Anr.

Respondent(s)

**FRESH REPORT ON BEHALF OF CENTRAL GROUND WATER  
AUTHORITY**

**It is most respectfully submitted that**

1. The Hon'ble Tribunal vide order dated 12.02.2024 directed CGWA to file fresh report with regard to action taken for preventing contamination of ground water.
2. In this regard, kind attention of Hon'ble Tribunal is invited to a similar matter Original Application No. 147/2021 in Hon'ble NGT, wherein issue of deficiencies in rain water harvesting systems resulting in polluted water mixing with the groundwater, was raised before the Hon'ble National Green Tribunal. Hon'ble NGT, Principal Bench, New Delhi, vide order dated 10.12.2021 had issued following directions:

*“In the light of experience gained in the present case, it appears that at many places where RWH systems are installed, the same are either not functional or resulting in contamination of ground water which situation needs to be remedied not only in Delhi but pan India. This may be urgently looked into by a joint committee of CPCB, Ministry of Jal Shakti (MoJS) and Ministry*



*of Urban Development, Government of India. Ministry of Jal Shakti (MoJS) will be nodal agency for the purpose. The Secretary, MoJS may call a meeting of stakeholders for further course of action in the light of above observations, followed by issuance of appropriate directions to all the States/UTs”.*

3. Accordingly, MoJS constituted a committee and directed to submit its report considering the following Terms of References (TOR) :-


**TOR-1:** Operational status including design parameters of the installed Rainwater Harvesting (RWH) systems. The Committee may identify few sites in States/ UTs for verification and preparation of reports.

**TOR-2:** To check the contamination status of Ground Water aquifers due to faulty design of RWH systems, if any, in the country. Committee may identify few sites for this purpose.

**TOR-3:** To suggest remedial measures to improve existing RWH system and also recommended preventive actions to avoid installation of faulty RWH systems in future including addressing of maintenance issues.

**TOR-4:** Any other activity considered appropriate by the committee.

4. That the Joint committee after several meetings, discussions, site inspection located in various parts of India i.e **Delhi, Haryana, Karnataka, Rajasthan, Tamil Nadu** prepared report which is annexed as **Annexure -I** which has been further been submitted to the Hon'ble Tribunal on 03.04.2023.



5. Furthermore, CGWA vide letter dated 31/03/2023(**copy annexed as Annexure-II**) directed all the states/UTs for **prevention of potential contamination of ground water from Rain Water Harvesting systems in Urban Areas.**
6. That the Ministry of Jal Shakti issued advisory dated 31/03/2023 along with SOP with **dos and don'ts** and for strictly adhering to the **BIS Standard - IS 15797:2008 for implementation of Roof Top Rain Water Harvesting System in the country.** The Chief Secretary of States/UTs were requested to direct/ instruct concerned Departments/agencies to strictly follow the guidelines including Do's & Dont's while implementing the RWH systems in there respective States/UTs. It has also been directed that the concerned department/agency in the State may approach Regional Director Offices of Central Ground Water Board (CGWB) for technical guidance/support, if any vide letter dated 31/3/2023 and also issued advisory to all the states / UTs for implementation and strict compliance. **Copy of advisory alongwith SOP with Dos & Don'ts and BIS Standard - IS 15797:2008 for implementation of Roof Top Rain Water Harvesting System** are annexed as **Annexure-III&Anneuxre-IV** respectively.
7. That the Central Ground Water Authority is committed to assist the State Governments in the implementation of Rain Water Harvesting System as per the advisories issued by the Ministry of Jal Shakti.

For Member Secretary,

Central Ground Water Authority

  
 VINOD KUMAR DHAUNDIYAL  
 Administrator  
 Central Ground Water Authority  
 Government of India  
 Ministry of Jal Shakti  
 Department of Water Resources, RD & GR  
 New Delhi

22/4/2024

**REPORT OF THE JOINT COMMITTEE CONSTITUTED TO LOOK INTO THE MATTER OF RAIN WATER HARVESTING SYSTEMS IN INDIA IN COMPLIANCE TO THE DIRECTION OF HON'BLE NGT IN THE MATTER, OA NO. 147/2021 – MAHESH CHANDRA SAXENA VS THE CHIEF SECRETARY, GOVERNMENT OF NCT OF DELHI & ORS**

**A. BACKGROUND/ INTRODUCTION**

**A-1: HON'BLE NGT DIRECTIVES**

In Original Application No. 147/2021 in Hon'ble NGT, issue of deficiencies in rain water harvesting systems resulting in polluted water mixing with the groundwater, was raised before the Hon'ble National Green Tribunal. The matter initially pertained to 40 Societies in Dwarka Area, Delhi. The Tribunal while disposing off the matter considered the need of joint inspection of rain water harvesting systems in all areas of Delhi to ensure proper functional design, depth of borewell, use of gravel and coarse sand in filter media.

Hon'ble NGT, Principal Bench, New Delhi, vide Order dated 10.12.2021 **further directed** the following.

*"In the light of experience gained in the present case, it appears that at many places where RWH systems are installed, the same are either not functional or resulting in contamination of ground water which situation needs to be remedied not only in Delhi but pan India. This may be urgently looked into by a joint committee of CPCB, Ministry of Jal Shakti (MoJS) and Ministry of Urban Development, Government of India. Ministry of Jal Shakti (MoJS) will be nodal agency for the purpose. The Secretary, MoJS may call a meeting of stakeholders for further course of action in the light of above observations, followed by issuance of appropriate directions to all the States/UTs".*

**A-2: CONSTITUTION OF COMMITTEE AND TOR**

In pursuance to the directives of Hon'ble NGT, a Committee under the Chairmanship of Chairman, Central Ground Water Board (CGWB) was constituted by MoJS vide Order Dated 19.01.2022 (**Appendix: A-1**) with the following members.

| S. No. | Committee Position | Representation  | Nomination  |
|--------|--------------------|---|---|
| 1.     | Chairman           | Chairman, CGWB  | ----  |
| 2.     | Member Secretary   | Member, CGWA  | -----   |
| 3.     | Member             | Representative of Central Pollution Control Board (CPCB)                    | Shri J Chandra Babu, Scientist, CPCB/ Ms Alpana Narula, Sr Scientific Assistant, CPCB |
| 4.     | Member             | Representative of Ministry of Housing and Urban Affairs (MoHUA)             | Dr Ramakant, Dy Advisor, PHE, CPHEEO  |
| 5.     | Member             | Representative of State of Delhi, Rajasthan, Haryana, Karnataka, Tamil Nadu |   |

ToR of the committee are as following.

**TOR-1:** Operational status including design parameters of the installed Rainwater Harvesting (RWH) systems. The Committee may identify few sites in States/ UTs for verification and preparation of reports.

**TOR-2:** To check the contamination status of Ground Water aquifers due to faulty design of RWH systems, if any, in the country. Committee may identify few sites for this purpose.

**TOR-3:** To suggest remedial measures to improve existing RWH system and also recommend preventive actions to avoid installation of faulty RWH systems in future including addressing of maintenance issues.

**TOR-4:** Any other activity considered appropriate by the committee.

#### **A-2: VC MEETING OF COMMITTEE ON 03.03.2022**

A meeting of committee was convened to decide course of action on 03.03.2022. Following action points emerged during the meeting held on **03.03.2022** (Minutes enclosed as **Appendix: A-2**).

1. Selected Member States, i.e Delhi, Haryana, Karnataka, Rajasthan and Tamil Nadu will share information/ data as below:
  - a. Provide list of Rain Water Harvesting structures sites to CGWA by 04.02.2020 for site visits / field inspections by the committee.
  - b. Provide Building Bye laws and rules that have been enacted by the states related to RWH system.
  - c. Provide standard design for RWH recharge structures formulated by concerned state departments.
  - d. Provide water quality impact assessment related to contamination of Ground Water, if available.
  - e. Provide existing penal provisions, if any, for groundwater contamination.
2. Constitute working group in 5 states drawing members from regional offices of CGWB and States government departments to support the joint committee and coordinate with them. Details of nominated officers are to be shared with all concerned.

Accordingly, teams were constituted for different States with representatives of states as members (**Table A-1**).

**Table A-1: Teams for Visit to Different States**

| State     | Team Members  |
|-----------|---|
| Delhi     | 1. Shri Sunil Kumar, Chairman, CGWA & CGWB<br>2. Dr P K Naik, Scientist E, CGWA, New Delhi<br>3. Shri Faizal Abrar, Scientist CGWB, New Delhi<br>4. Ms Alpana Narula, Sr Scientific Assistant, CPCB<br>5. Shri Harish Chander, Addl Chief Engineer (C-8), DJB<br>6. Shri Vimal Belani, Executive Engineer, (RWH-I), DJB<br>7. Shri Rakesh Sharma, AE (RWH-I), DJB |
| Haryana   | 1. Dr Rajesh Chandra, Scientist E, CGWA, New Delhi<br>2. Ms Alpana Narula, Sr Scientific Assistant, CPCB<br>3. Shri Rakesh Kumar, Chief Hydrologist, GW Cell, Haryana<br>4. Shri Pankaj Mahaliya, Chief Hydrologist, GW Cell, Haryana   |
| Karnataka | 1. Shri N Jyothi Kmar, Scientist, CGWB, Bengaluru<br>2. Shri A K Patre, Scientist, CGWA<br>3. Dr Vikas Ranjan, Scientist CGWA, New Delhi<br>4. Shri Rahul R Shende, Scientist, CGWB, Bengaluru  |

|            |  |
|------------|--|
|            | <ol style="list-style-type: none"> <li>5. Shri J Chandra Babu, Scientist, CPCB, New Delhi*</li> <li>6. Shri Jayanna, Dy Director, KGWA</li> <li>7. Ms Ambika T. Dy Director, GWD</li> <li>8. Ms Chhaya, Sr Geologist, GWD</li> <li>9. Shri Lakshmi Narayana N, Superintendent, GWD</li> <li>10. Dr U T Vijay, Chief Scientific Officer, KSCST, IISc Campus, Bengaluru</li> </ol> |
| Rajasthan  | <ol style="list-style-type: none"> <li>1. Shri A K Patre, Scientist, CGWA</li> <li>2. Shri Anmol Sharma, Scientist, CGWA, New Delhi</li> <li>3. Shri Sujit Kumar, Scientist, CGWB, Jaipur</li> <li>4. Shri J Chandra Babu, Scientist, CPCB, New Delhi*</li> <li>5. Shri Anoop Thereja, Sr Hydrogeologist, GWD, Jaipur Division, Rajasthan</li> </ol>                             |
| Tamil Nadu | <ol style="list-style-type: none"> <li>1. Dr Vikas Ranjan, Scientist CGWA, New Delhi</li> <li>2. Shri J Chandra Babu, Scientist, CPCB, New Delhi*</li> <li>3. Shri S P Nayagam, Scientist, CGWB, Chennai</li> <li>4. Er. S. Raja, Jt Chief Engineer, WRD, Tamil Nadu**</li> </ol>  |

\*Presently posted at CPCB, Bengaluru; \*\*Presently retired

Working groups in the States formed to support and coordinate with central teams which were headed by respective Regional Director of CGWB and assisted by officers of CGWB Regional offices and State Government departments.

State-wise details of visited sites are given in following table (**Table A-2**) sites visited.

**Table A-2: RWH Sites visited in Different States**

| State           | Date(s) of Visit              | Sites Visited  |
|-----------------|-------------------------------|--|
| Delhi (DL)      | 07.03.2022                    | <b>DL-1</b> Gold Croft CGHS Ltd., Plot No. 4, Sector-11, Dwarka, Delhi<br><b>DL-2</b> Hind CGHS Ltd., Plot No. 12, Sector-5, Dwarka, Delhi<br><b>DL-3</b> Guru Tegh Bahadur Institute of Technology, G-8 Area, Rajouri Garden, New Delhi<br><b>DL-4</b> Siri Fort Auditorium, August Kranti Marg, New Delhi  |
| Haryana (HR)    | 22.02.2022                    | <b>HR-1</b> Maruti Suzuki India Ltd, IMT, Manesar, Haryana<br><b>HR-2</b> Corporate Office Complex, Bestech India Pvt Ltd, Sector-44, Gurugram, Haryana  |
| Karnataka (KA)  | 26.02.2022                    | <b>KA-1</b> Sir M. Visvesaraiyaa RWH Theme Park, Bengaluru.<br><b>KA-2</b> Falcon City Residential Complex, Bengaluru<br><b>KA-3</b> ABB Limited, Bengaluru  |
| Rajasthan (RJ)  | 19.02.2022<br>&<br>20.02.2022 | <b>RJ-1</b> Ankit Roofings Ltd, Vill. Dahami Khurd, Sanganer Block, Jaipur<br><b>RJ-2</b> State GWD Campus, Sanganer Block, Jaipur<br><b>RJ-3</b> Rajbhawan, Jhothwara Block, Jaipur   |
| Tamil Nadu (TN) | 24.02.2022<br>&<br>25.02.2022 | <b>TN-1</b> Rain Centre, Akash Ganga Trust Adyar, Chennai.<br><b>TN-2</b> Tharamani Campus of WRD, Chennai<br><b>TN-3</b> Phoenix Market City Velachery Chennai<br><b>TN-4</b> SSM Residential Complex, Nedunkundram village, Vandalur Chengalpattu District.<br><b>TN-5</b> Putlur Check Dam, Tiruvallur District, Tamilnadu<br><b>TN-6</b> Asian Paints Ltd, Pondura, Sriperumbudur, Kancheepuram district |

On-the-spot study of RWH Structures were carried out by different teams keeping in view the ToRs of the committee.

**A-4: LAYOUT OF PRESENTATION OF OBSERVATIONS, CONCLUSIONS AND SUGGESTIONS OF COMMITTEE AS PER TOR**

**Section-B** summarizes State-wise **Observations/ Findings** of the Committee, which include **summary** of relevant rules and findings based on the site visits. State-wise **Rules** and

regulations promulgated, as well as reports of the individual site visits are attached as **Appendices**. Name of the States in this report are abbreviated for convenience as following: Delhi-DL; Haryana-HR; Karnataka-KA; Rajasthan-RJ; Tamil Nadu-TN.

**Section-C** summarizes salient conclusions based on the rules / visits as per **ToR-1 & 2**, followed by **suggestions (Section-D)** as per **ToR-3 & 4**.

## B. STATE-WISE OBSERVATIONS/ FINDINGS FROM THE VISIT/ STUDY OF RULES

### B-1: DELHI (DL)

#### B-1.1: RWH Rules & Regulations, Delhi (Appendix B-1.1: DL RWH Rules)

- i. **Implementation** of RWH is governed by 'Building By-laws, 1983 (Amendment, 2001)' of Ministry of Urban Development and its further reinforcement through provisions in 'Delhi Water & Sewer (Tariff & Metering) Regulation, 2012 and its Amendment, 2016 of Delhi Jal Board (DJB).
- ii. Provisions in DJB's regulations make it mandatory to install RWH system depending upon Plot size (more than 100 sqm).
- iii. RWH is not mandatory in areas having depth to ground water levels less than 5m below ground.
- iv. It is also not mandatory to construct borewell for recharge. Only RWH through Roof Top is mandatory (Amendment, 2016 to Delhi Water & Sewer (Tariff & Metering Regulation). The amendment has been made to avoid misuse of borewell for groundwater extraction in the name of recharge.
- v. There is incentivization for installation of RWH system through rebate, and also penal provisions for non-installation of RWH in the form of 1.5 times tariff (water charges).
- vi. New water/ sewer connections are sanctioned by DJB, subject to installation of RWH System. To ensure installation in existing buildings Public Notices have been issued, notifying penal provisions, if the concerned fail to inform about the installation of RWH system in existing buildings.
- vii. RWH Guidelines of DJB advise that '*only non-polluted rainwater from the roof tops and other catchment areas has to be diverted to recharge structure through connection of downpipe*'. However, **there is no penal provision for contamination of groundwater due to faulty recharge.**

#### B-1.2: Inspection Visit, Delhi (Appendix B-1.2: DL RWH Insp)

- i. **Four sites** were visited upon.
  - DL-1 Gold Croft CGHS Ltd., Plot No. 4, Sector-11, Dwarka, Delhi
  - DL-2 Hind CGHS Ltd., Plot No. 12, Sector-5, Dwarka, Delhi
  - DL-3 Guru Tegh Bahadur Institute of Technology, G-8 Area, Rajouri Garden, New Delhi
  - DL-4 Siri Fort Auditorium, August Kranti Marg, New Delhi
- ii. **Gold Croft CGHS Ltd (DL-1):** Water levels of nearest Piezometer at Dwarka (less than 1 Km from DL-1) show rise of 7m from 2019 to 2021. Water sample from this piezometer has all the basic chemical parameters within permissible limits. Heavy

Metals concentrations (Cr, Mn, Fe, Ni, Cu, Zn, As, Se, Ag, Cd, Pb, U) are also within permissible limits.

- iii. **Hind CGHS Ltd (DL-2):** The **piezometer** representing DL-1 is also representing DL-2. It is also located at a distance of around **1 Km from DL-2**.
- iv. **Guru Tegh Bahadur Institute (DL-3):** RWH system comprises 5 recharge pits (without borewell) of approximate 2m depth each. Post-monsoon water levels recorded in the nearest piezometers at Tagore Garden ( $\approx 2$  Km from site) and Mayapuri ( $\approx 4$  Km from site) show decline of 5-7m in last 12 years. **Water sample from Tagore Garden Pz shows high EC and other basic chemical parameters.** However, heavy metals concentrations (Cr, Mn, Fe, Ni, Cu, Zn, As, Se, Ag, Cd, Pb, U) are within permissible limits in ground water.
- v. **Siri Fort Auditorium (DL-4):** RWH System comprises of 10 Recharge Pits (without recharge well) of 2.2m depth each. Water levels recorded in the nearest piezometer at Hauz Khas ( $\approx 1$  Km) shows rise of 6-7m from 2006-2021 (15 years). Basic parameters and Heavy Metals concentrations in water sample taken from Hauz Khas Pz are within permissible limits except Uranium concentration (78 ppb).
- vi. **At all the four sites visited,** Rain water harvesting pits were found to be clean and working. Terrace of the building blocks were also found to be clean.
- vii. As per information provided, all structures and filter media are regularly cleaned. Inspection Team rendered advice as regard to proper maintenance of RWH system and **Geo-tagging of RWH/ Recharge structures.**

## B-2: HARYANA (HR)

### B-2.1: RWH Rules & Regulations, Haryana/ Gurgaon (Appendix B-2.1: HR RWH Rules)

- i. **Implementation** of RWH is governed by 'The Haryana Building Code, 2016'. The Code also uses provisions of Water (Prevention & Control) of Pollution Act, 1974 with some amendments.
- ii. **Roof top RWH** is mandatory for roof area 100 Sqm or more and **Recharge** is mandatory for any building on plot area 500 Sqm or more, parks, vehicles' parking places, plazas, playgrounds and other common areas. Water so harvested is to be utilized for non-potable uses and recharge of aquifer.
- iii. Recognized Architect / Engineer is to certify that RWH is functional and any misrepresentation by them shall attract penal proceedings.
- iv. RWH system is to be properly designed so that **contaminated water does not enter** into RWH/ recharge system.
- v. Recharge well should be at least 10m away from any structure handling sewage/ industrial effluent (not applicable on manholes/ sewer lines although it shall be ensured that these are leak-proof).

### B-2.2: Inspection Visit, Haryana/ Gurugram (Appendix B-2.2: Haryana RWH Insp)

- i. **Two sites** were visited upon.  
**HR-1** Maruti Suzuki India Ltd, IMT, Manesar, Haryana

**HR-2** Corporate Office Complex, Bestech India Pvt Ltd, Sector-44, Gurugram, Haryana

- ii. **Maruti Suzuki India Ltd, IMT (HR-1):** At Maruti Suzuki Unit, there are 6 Lagoons having RWH cumulative capacity of 119660 CUM. At the time of visit, lagoons were completely dry and recharge wells were in running condition. Two Piezometers with DWLR are installed in the premises. There are separate and isolated pipelines for channelization of storm water to lagoons (RWH Storage). Dedicated and separate pipelines are laid for collection of Sewage and effluent to Effluent Treatment Plant (ETP Capacity: 5840 KL/Day) and Sewage Treatment Plant (STP Capacity: 1187). As per the company representative, storm water is completely insulated from sewage and effluent. To prevent contamination of run-off from paved area, trap has been provided for capturing oil/silt and transferring them to ETP. RWH system is totally insulated from sewage and wastewater from areas likely to have oil and grease, or other pollutants and that all the structures and filter media are regularly cleaned. Sample collected from TW near Gate No. 3 has all basic parameters and heavy metals analysed within permissible limits, except nitrate (65 mg/L), which is above permissible limit (45 mg/L). The inspection team rendered advice as regard to installation of **Piezometer in vicinity** of every Lagoon to keep regular checkup on water level and Quality of ground water.
- iii. **Bestech India Pvt Ltd (HR-2):** RWH system comprises of one Recharge Pit with Recharge Well. STP of 20 KLD capacity with MBBR Technology has been installed in the premises. As per representative of the firm, RWH system is totally insulated from sewage that all the structures and filter media are cleaned annually. Sample collected from RWH structure has all basic parameters and heavy metals analysed within permissible limits The team advised to clean the system 4 times a year.

**B-3: KARNATAKA (KA)**

**B-3.1: RWH Rules & Regulations, Karnataka/ Bengaluru (Appendix B-3.1: KA RWH Rules)**

- i. **Implementation** of RWH is governed by **Bangalore Water Supply and Sewerage (Amendment) Bill 2009, 2020 & 2021, BWSSB Rain Water Harvesting Act 72A Amendment 2021 and State Ground Water Act 2011**
- ii. Guidelines for RWH issued by BWSSB contains chapter on water quality and treatment to prevent contamination of recharged water. A chapter on RWH is included in the SGW Act.
- iii. RWH is mandatory in existing buildings having site dimension of 216 sqm and above and in new buildings constructed on site measuring 108 sqm and above.
- iv. Vide Amendment, 2020, capacity of Roof Top TRWH recharge structure was enhanced from 20 lt/sqm to 60 lt/sqm, whereas in respect of land based RWH, the capacity was enhanced from 10 lt /sqm to 20 lt/sqm.
- v. Dual pipe system is to be installed for RWH structure for utilization of harvested water for purposes other than drinking, cooking and bathing.
- vi. There is penal provision in case of non-compliance to RWH conditions in the form of additional charges in Monthly Water Bill till RWH is implemented. RWH system is inspected by the representative at the time of visit for water meter reading.

- vii. Regular monitoring by BWSSB of RWH schemes already implemented and organizing awareness programmes.
- viii. As per Act, Municipal Corporations, local authorities are to impose mandatory RWH conditions while according approval for construction (100 Sqm or more); permanent water and electricity connections shall be extended only after compliance of directions.
- ix. However, there are **no penal provisions for ground water contamination, neither in BWSSB guidelines, nor in the State Ground Water Act.**

**B-3.2: Inspection Visit to Karnataka/ Bengaluru (Appendix B-3.2: Karnataka RWH Insp)**

- i. **Three sites** were visited upon.
  - KA-1 M. Visvesaraiyaa RWH Theme Park, Bengaluru.
  - KA-2 Falcon City Residential Complex, Bengaluru
  - KA-3 M/s ABB Limited, Bengaluru
- ii. **Sir M. Visvesaraiyaa RWH Theme Park (KA-1):** The Theme Park has been set up to **demonstrate different techniques of Rain Water Harvesting** to common people through RWH storage structures with different methods of storage of rain water and recharge wells within the premises. The park is popularizing the idea of RWH to the general public, students, NGO's, architects, engineers, plumbers etc. As per BWSSB officials maintaining the park, there is no scope of contamination of ground water due to artificial recharge in the premises. However, total **coliform** was **found present** in groundwater sample from the Recharge Well in Theme Park premises. **The presence of coliform in ground water sample may be** because of extraneous reasons. *Sample from borewell within the premises analysed has Uranium concentration beyond the permissible limit of 30 ppb, which may be geogenic in nature.*
- iii. In **Falcon City Residential Complex (KA-2)**, rooftop run-off is collected in Storage tanks for non-potable purposes. Chemical analyses of groundwater samples from recharge pit and nearest borewell within the premises has all basic chemical parameters within permissible limits of BIS Drinking Water Specifications (IS:10500-2012). All the recharge and storage structures are well maintained. Proper mechanism is in place to prevent sewage water from mixing into run-off/ recharged water. However, the management could not provide design of system and structures.
- iv. **ABB Ltd (KA-3)** has constructed rain water **storage-cum-recharge structures using cross wave technology** – i.e storage tanks made of Polypropylene (highly water-resistant resin) with a **high void ratio** (Claimed as almost 95%), enabling creation of larger water storage space in a smaller area compared to conventional tanks. Strength of such structure is high and therefore; space above can be utilized for parking etc. The company has installed flow-meter at storage-cum recharge structure to ascertain quantum of recharge. Trial of flow-meter has shown that initial intake capacity of structure is around 3 cum/Hr. However, the structure was yet to get its first monsoon rain, when field visit was made. There are **separate pipelines for sewage collection which are connected directly from building toilets to STP collection tank.** The firm has plan for periodic maintenance and checking to avoid

any leakage in sewage pipeline. **Recharge wells were dry during inspection. Ground water quality** report of the **nearest borewell** within the premises (77m Deep) indicates that the measured values for the allbasic chemical parameters are **within BIS Drinking Water Specifications/ permissible limits**. The efficacy of cross-wave reservoir was also studied later by CGWB by filling the cross-wave reservoir through tank water supply and observing the capacity of the tank. It was found that storage space of the structure is  $\approx 95\%$ . It was also observed from water levels recorded during the study that recharge is taking place through recharge well.

- v. The management/ maintenance team of all the above sites have been advised to bypass first flush and to prevent entry of water from paved area having vehicular movement from entering into the RWH system.

#### B-4: RAJASTHAN (RJ)

##### B-4.1: RWH Rules & Regulations Rajasthan/ Jaipur (Appendix B-4.1: RJ RWH Rules)

- i. **Implementation of RWH** is governed by **Urban Area (Name of City) Building Regulation, 2020**.
- ii. There is mandatory RWH Unit/ Structure in plot areas 225 Sqm or more.
- iii. Security deposit for construction of RWH System is refunded only after submission of verification report by retired engineer.
- iv. There is **no mention of ground water quality** aspect in the regulation.

##### B-4.2: RWH Inspection Visit Rajasthan/ Jaipur (Appendix B-4.2: RJ RWH Insp)

- i. Three sites were visited upon.  
**RJ-1** Ankit Roofings Ltd, Vill. Dahami Khurd, Sanganer Block, Jaipur  
**RJ-2** State GWD Campus, Sanaganer Block, Jaipur  
**RJ-3** Rajbhawan, Jhothwara Block, Jaipur
- ii. **Ankit Roofings Ltd (RJ-1):** RWH System was installed in the year 2005-06, and comprises of storage tank of 25 m<sup>3</sup> capacity and filter pit (3.6 m deep) with 60m deep injection well. Run-off from Roof Top and Paved Area is diverted to the storage tank. Water level recorded in Piezometer installed in the premises was **32.92mbgl** in **pre-monsoon 2013**. During the visit in **February, 2022**, water level in the same piezometer was recorded as **36.98 mbgl**. EC of water sample has increased marginally from 1153 mmhos/cm in 2017 to 1541 mmhos/cm in February, 2022. As per representatives of firm, roof top is cleaned twice a year and filter media is cleaned/ replaced annually.
- iii. **GWD Campus (RJ-2):** RWH System was constructed in the year 2000-01 under Central Sector Scheme. It is a Roof Top TRWH system (Run-off from paved area is not harvested) and comprises of Main Collection/ Desiltation Chamber and Recharge Trench with 40m deep Injection Well / Recharge Shaft. At the time of visit there was no debris or water in the trench, indicating that system was working fine. Rise in water level of about 10m ( $\approx 63\text{mbgl}$  to  $\approx 53\text{mbgl}$ ) over last 10 years (2012-2021) has been observed in the piezometer installed in the premises. There is increase in EC value from 760 mmhos/cm (in 2001) to 1150 mmhos/cm (in 2022 – present visit) of the samples collected from TW in the premises. **Nitrate has increased significantly**

from 30 mg/l (permissible limit is 45 mg/l) to 140 mg/l, **indicating mixing of polluted water**. As informed by GWD officials, roof top is cleaned 2-3 times a year. Filter media is cleaned/ desilted annually.

- iv. **Raj Bhawan (RJ-3):** RWH System was constructed in the year 2000-01 under Central Sector Scheme. It is a RTRWH system (Run-off from paved area is not harvested) having 19m Injection Well/ Recharge Shaft for ground water recharging. **3.7m rise** in water level (26.4mbgl to 22.7mbgl) has been observed over last 10 years (2012-2021) in the piezometer installed in the premises. There is **increase in EC value** from 910 mmhos/cm (in 2014) to 1850 mmhos/cm (in 2022 – present visit) also. The ground water samples has been taken from TW located in the premises. **Nitrate has increased significantly** from 89 mg/l to 200 mg/l during this period (permissible limit of 45 mg/l). However, EC and nitrate in water sample collected in desiltation chamber have been found to be 560 mmhos/cm and 2.3 mg/l respectively. As informed by GWD officials, roof top is cleaned 2-3 times a year. Filter media is cleaned/ desilted annually.
- v. The State Government officials maintained that increase in EC and/ or nitrate is not attributable to fault in RWH system, but to extraneous factors.

#### B-5: TAMIL NADU (TN)

##### B-5.1: RWH Rules & Regulations Tamil Nadu/ Chennai (Appendix B-5.1: TN RWH Rules)

- i. Implementation of RWH is governed by **Tamil Nadu Combined Development & Building Rules, 2019** of **Municipal Administration and Water Supply Department**.
- ii. In Non-High-Rise buildings up to 12m, Roof Top water is to be collected in a sump through a filter for immediate use and surplus is to be diverted to Source Well/ Dug Well (where existing) or to a Recharge Well (where no Dug Well is existing). Run-off from paved area is to be intercepted near gate and is to be led to a Recharge Well.
- iii. In Non-High-rise such as above on plots with small area, Roof Top harvested water is to be diverted to Percolation Pits.
- iv. In Non-High Rise between 12-18.3m / industries/ institutional buildings, as well as in High Rise buildings, similar methods as (i) or (ii) or combination of two can be applied.

##### B-5.2: RWH Inspection Visit Tamil Nadu/ Chennai (Appendix B-5.2: TN RWH Insp)

- i. **Six sites** were visited upon by the Joint Team. Out of these, one site was a Check Dam built outside the Thiruvallur city limits and does not have much relevance in the present context. Hence, **report of 5 sites** has been attached in this report.

**TN-1** Rain Centre, Akash Ganga Trust Adyar, Chennai.

**TN-2** Tharamani campus of WRD, Chennai

**TN-3** Phoenix Market City Velachery Chennai

**TN-4** SSM Residential Complex, Nedunkundram village, Vandalur Chengalpattu district.

**TN-5** Putlur Check dam, Tiruvallur district.

**TN-6** Asian Paints Ltd, Pondura, Sriperumbudur, Kancheepuram district

- ii. **Akash Ganga Rain Centre (TN-1):** The run-off from paved areas is being collected through drains covered with perforated slabs and water is allowed into recharge shaft / well of 15 feet depth directly, without passage through any filter media. Founder of Rain Centre Shri. Sekar Raghavan maintains that providing filter retards recharge as the filter media gets choked quickly after one or two rains. He has been popularizing this technique among common people. There is always a possibility of aquifer material getting choked if recharge water is not passed through filter. Hence, Shri Raghvan has been advised to let the water pass through filter media before recharge. It was observed that TDS of sump water was 120 mg/l and that of open well 1214 mg/l. Concentration of other chemical constituents were considerably high in ground water samples of open well. This may be due to mixing of water from additional natural flow into open well.
- iii. **GWD, Tharamani (TN-2):** Main structure is underground storage tank/ sump, made largely using uPVC pipes Technique. Top of the sump is being used as Parking Space. Water stored in the structure provides adequate amount of water for the office use for 5 to 6 months in a year. After implementation, sufficient water is available to augment water supply to the office establishment for non-potable purposes. There has been no requirement of frequent cleaning in the past five years. Water is being tested for quality periodically and found suitable for domestic purposes. The technique used is unique and easy to construct. But, considering the cost of imported material being used, cost of total system is on higher side by around 30% in comparison to conventional system.
- iv. **Phoenix Mall (TN-3):** RWH System comprises of recharge pits with 15m deep recharge shaft. In the event of over-flow, the surplus run-off is diverted to nearest lake (Velachery Lake), approximately 250m south of Phoenix Market City. Run-off from paved area having vehicular movement is also being diverted towards RWH system.
- v. **SSM Residential Complex (TN-4):** The RWH system comprises of Recharge Pits (3m deep) with filter and Sumps/ Storage Tanks. The complex is divided into linear blocks with alternate bays for sewage and RWH channels. Overflow from recharge pits is stored in Sumps/ Storage Tanks for non-potable uses. The RWH system provides adequate amount of water for gardening for this Residential Building Complex nearly for 5 to 6 months in a year. Committee observed that RWH system has been implemented within the SSM Residential Complex though ground water level is shallow as the complex is close to coastal waters. Only one pit was shown to the team.
- vi. **Asian Paints (TN-6):** Rooftop rainwater is collected through pipes and trenches into a large storage tank having holding capacity of 6000 kilo liters. Efficiency of structure provides adequate amount of water for the industrial use nearly for 5 to 6 months. The industry is ZLD. Hence, chances of contamination are virtually non-existent. Industry took necessary step to close down the recharge pits after notification of CGWA guidelines, which advise only conservation for certain category of industries. However, State Government, does not have any such restriction on recharge. Chemical quality results are included in the respective report of site visit.

- vii. Management and maintenance team at all the visited sites informed that all the structures and filter media are regularly cleaned/ replaced. They were advised to bypass the first flush. It was also advised to avoid water from car parking areas into the system.

C. **SALIENT CONCLUSIONS BASED ON THE STUDY OF RULES AND OBSERVATIONS FROM RWH SITE VISITS (AS PER TOR-1 & 2)**

ToR-1 & 2 of the Committee state the following.

**ToR – 1:** *Operational status including design parameters of the installed Rain Water Harvesting (RWH) systems. The Committee may identify few sites in States/ UTs for verification and preparation of reports.*

**ToR – 2:** *To check the contamination status of Ground Water aquifers due to faulty design of RWH systems, if any, in the country. Committee may identify few sites for this purpose.*

Accordingly, visits were undertaken to selected sites and rules pertaining to RWH were studied (**Section-B** above). A matrix summarizing the site-wise observations on some key aspects is enclosed as **Appendix-C**. Salient collective observations and conclusions are summarized here.

**ToR – 1:** Operational status including design parameters of the installed Rain Water Harvesting (RWH) systems

(a) In all the visited States, RWH in urban areas has been made mandatory under Building Rules or other State Acts/ Rules. **However, penal provisions for ground water contamination due to faulty RWH design** or due to lack of proper and timely maintenance are **missing**. Overall, RWH systems were found as per design and norms of Central/ State Agencies at all the visited sites.

(b) In general, the collected/ harvested water is used for non-potable and/ or recharge purposes. Out of 17 RWH systems visited, 9 systems have Recharge Pits and 6 systems have both Recharge Well and Recharge Pits. Remaining 2 sites have storage/ conservation structures only.

(c) In some **individual houses**, recharge structures have been found deviating from **scientific design**. It was observed in Chennai that **recharge structures have been made without filter media** (Para B-5.2(ii)).

(d) It was observed that Industrial units follow prevailing guidelines for RWH and AR. (Para B-2.2(ii); (Para-B-3.2(iv)); (Para-B-5.2(vi))).

(e) RWH structures were found maintained at the time of inspection.

**ToR – 2:** To check the contamination status of Ground Water aquifers due to faulty design of RWH systems

(f) During monsoon season, recharge takes place and **if any** contamination has taken place, its spread/ signature/ indications should be present in nearby well-samples during

post-monsoon period. Keeping the above in view, groundwater samples were collected from nearby wells. At some places, where water was available in structure itself, sample of the same was also collected.

(g) In general, chemical quality of water, has been found within the permissible limit. However, total **coliform** was **found** in groundwater sample from RWH well in Theme Park premises, Bengaluru (**Para B-3.2(ii)**). It is also observed that recharging water at Akash Ganga Rain Centre, Chennai may be getting mixed with water from other places. Water from other places may get diverted into open well (known as Source Well), hence, the chemical constituents have considerably higher values in comparison to sump water (**Para B-5.2(ii)**).

At **all the three sites** visited in Jaipur, Rajasthan (**Para B-4.2(ii); B-4.2(iii) & B-4.2(iii)**), it has been observed that **EC/ TDS and/ or nitrate** content in tube-wells located within the premises of RWH system have **increased** over past few years.

(h) Rain water harvesting techniques are popular, due to improper and unscientific implementation, the ground water **recharge component of RWH system is not functioning as desired**. **Presence of coliform and Nitrate in ground water (Para – g above)** indicate that the design adopted does not address the site-specific conditions. **The damage to aquifer in such cases would be permanent**. Lack of insulation of overland flow from contamination may pollute aquifer (**Para – 5.2(iv)**).

#### D. SUGGESTIONS OF THE COMMITTEE (AS PER TOR-3 & 4)

**ToR-3 & ToR-4** of the Committee state the following.

**ToR – 3:** *To suggest remedial measures to improve existing RWH system and also recommend preventive actions to avoid installation of faulty RWH systems in future including addressing of maintenance issues.*

**ToR – 4:** *Any other activity considered appropriate by the committee.*

Based on the salient conclusions drawn from study of rules pertaining to RWH in the visited areas and implementation of RWH at selected sites, following suggestions can be made as per ToR of the Committee.

**ToR – 3:** To suggest remedial measures to improve existing RWH system

(a) Bureau of Indian Standards (BIS) has a dedicated Committee – **Ground Water and Related Investigations Sectional Committee, WRD 03**. The Committee, in consultation with experts have developed the following BIS standards.

- (i) Indian Standard – Artificial Recharge to Ground Water Guideline (IS 15792: 2008)
- (ii) Indian Standard – Roof Top Rainwater Harvesting – Guidelines (IS 15797: 2008)

The BIS standard **IS 15797:2008** for Roof Top Rainwater Harvesting - Guidelines (enclosed as **Appendix-D**) may be popularized among the user agencies for implementation of RTRWH system in **urban areas**. **Section 6.5 of the document** deal with general 'Management and Maintenance' of the system and **Section 7.4** specifically with 'Management of Catchment Area, Drains and Recharge Structures'. **Section 7** provides

designs of AR structures suitable to different situations. The States may be mandated to adopt these standards in major cities.

(b) RWH schemes may have Artificial Recharge provisions depending upon local hydrogeological/ site-specific conditions. However, **recharge** needs to be **avoided** in areas where there is possibility of contamination of groundwater. In such cases storage of rainwater should be encouraged.

(c) Strict guidelines for protecting aquifer from contamination and damage need to be formulated. Depending upon groundwater flow direction, RWH/ AR sites need to be located as far as possible from potential contaminant source such as sewage drains/ landfill sites/ cesspool/ sewage system having hydrogeological connectivity with the aquifer.

(d) As stated in previous Section (Para C-(a)), penal provisions for ground water contamination caused due to faulty RWH/ designs or due to negligence in maintenance are lacking or weak. Legal provisions should be introduced in State Government rules as per EPA, 1986 for contamination of groundwater owing to faulty RWH designs and/or due to poor maintenance. Penal provisions may, however, be applied as the last resort.

(e) There should be web-based, area-specific model design for guidance on the basis of hydrogeological set-up of the area.

(f) In respect of small households, cluster-based RWH system should be promoted in place of individual household scheme.

(g) Model similar to Bengaluru for ensuring compliance to mandatory RWH conditions (Para B-3.1 (vi)) may be adopted in other urban areas too. **However**, the monitoring mechanism has to be made more effective through involvement of officials trained to evaluate functioning of installed RWH system as per **BIS Standards**.

(h) There should be incentivization for adopting RWH, either in the form of rebate or subsidy in **water-stressed areas**. Also, penalty on non-compliance or non-adherence to the norms can be imposed, say in the form of additional water charges ((Para B-3.1 (vi)).

(i) Large-scale RWH system, such as those in large industrial, residential and commercial complexes, should have piezometer(s) installed at appropriate site(s) for periodic monitoring of water level and water quality. These parameters are the most important and reliable indicators of functioning status and health of RWH system.

(j) The design of RWH should by-pass first flush. Mixing of drain water with rooftop run off or with runoff from paved areas, where vehicular movement takes place, should be prevented.

**ToR – 4:** Any other activity considered appropriate by the committee

(k) As water quality may not be strictly checked, the water stored in harvesting structures may be **used for non-potable purposes**.

(l) **Concept** like RWH Theme Park, Bengaluru (Para B-3.2(ii)) run by Government Body may be promoted for proper guidance to general public/ individual households. It may be adopted in other urban areas too.

(m) Underground Storage tank/ sump, made **using cross-wave technology** (Para B-3.2(iv)) or **uPVC pipes** (Para B-5.2(iii)) **saves space, besides providing strength to the structure**. As it is **costly**, the technology may be used in large **Government Buildings**, commercial complexes and industrial premises.

(n) All RWH sites should be geo-tagged for better visibility for monitoring purpose.

- (o) There should be mechanism to avoid misuse of the recharge tubewells for pumping purposes.
- (p) Online filters can also be recommended to avoid minor contaminations, if any, for diverting the rooftop rainwater to the recharge tubewells.
- (q) New residential complexes may be divided in a way to have alternate bays for sewerage and RWH channels.

भारत सरकार  
जल शक्ति मंत्रालय  
जल संसाधन, नदी विकास और गंगा संरक्षण विभाग  
केंद्रीय भूजल प्राधिकरण  
18/11 जामनगर हाउस, मानसिंह रोड  
नई दिल्ली-110011  
ई-मेल: cgwa@nic.in



Government of India  
Ministry of Jal Shakti  
Department of Water Resources, RD & GR  
Central Ground Water Authority  
18/11, Jamnagar House, Mansingh Road  
New Delhi – 110011  
E-mail: cgwa@nic.in

File No: CGWA-26/1/2022-CGWA

Date: 31.03.2023

To

The Additional Chief Secretary/ Principal Secretary/ Secretary  
Irrigation/ Water Resources/ Ground Water/ PHE  
All States/ UTs (as per list)

**Sub: Prevention of potential contamination of ground water from Rain Water Harvesting systems – Reg**

Sir/ Madam

May I invite your kind attention towards Hon'ble NGT observations, expressing concern over Rain Water Harvesting system being one of the potential sources of contamination of ground water. The Principal Bench, Delhi of Hon'ble NGT, in its order dated **10.12.2022** while disposing of matter related to societies in Dwarka area, Delhi (OA 147/2021 ground water in the country). The Principal Bench, Delhi of Hon'ble NGT, while disposing of matter related to societies in Dwarka area, Delhi (OA 147/2021), vide their order dated 10.12.2021 directed that '*at many places where RWH systems are installed, the same are either not functional or resulting in contamination of ground water which situation needs to be remedied not only in Delhi but pan India. This may be urgently looked into by a joint Committee of CPCB, Ministry of Jal Shakti (MoJS) and Ministry of Urban Development, Government of India. MoJS will be the nodal agency for the purpose.*'

A committee constituted by the Ministry visited selected RWH sites in 5 States – Delhi, Haryana, Karnataka, Rajasthan and Tamil Nadu and submitted its report. On the basis of the findings of committee, Department of Water Resources, RD & GR, Ministry of Jal Shakti has issued advisory to all States vide letter No. T-81011/77/2021 - GW Section-MOWR, dated 31.03.2023 along with recommendations of committee and SOP for implementing Rain Water Harvesting schemes.

The advisory is enclosed herewith for compliance. Action taken on the advisory may please be communicated by 04.04.2023 for submission to Hon'ble NGT before the next hearing scheduled on 10.04.2023.

Yours faithfully

(A K Agrawal)  
Member Secretary  
Central ground Water Authority

To

The Principal Secretary/ Secretary  
Ground Water & Water Audit Department, Andhra Pradesh  
secy\_irrgn@ap.gov.in, psdwrap15@gmail.com

The Principal Secretary/ Secretary  
Water Resource Department, Arunachal Pradesh  
secretary wrd6@gmail.com

The Principal Secretary/ Secretary  
Irrigation Department, Assam  
s.abbasi@nic.in

The Principal Secretary/ Secretary  
Minor Water Resources Department, Bihar  
secmnir-bih@nic.in

The Principal Secretary/ Secretary  
Chandigarh Municipal Corporation, Chandigarh, Chandigarh  
hs-chd@nic.in

The Principal Secretary/ Secretary  
Water Resources Department, Chhattisgarh  
secy-wrd.cg@gov.in

The Principal Secretary/ Secretary  
Public Work Department, Daman & Diu, Dadra & Nagar Haveli  
secretary-pwd@ddd.gov.in

The Principal Secretary/ Secretary  
Water Resource Department, Goa  
sec-wrd@goa.gov.in

The Principal Secretary/ Secretary  
Gujarat Water Resources Development Corporation Limited (GWRDC Ltd), Gujarat  
splsec-nwrws@gujarat.gov.in

The Principal Secretary/ Secretary  
Irrigation and Water Resources Department, Haryana, Haryana  
fci wrd@gmail.com

The Principal Secretary/ Secretary  
Jal Shakti Vibhag, Govt. of Himachal Pradesh, Himachal Pradesh  
iphsecy-hp@nic.in

The Principal Secretary/ Secretary  
Jal Shakti Department, Govt of J&K, Jammu & Kashmir  
pscsphe@gmail.com

The Principal Secretary/ Secretary  
Department of Water Resources, Jharkhand  
sec-wrd-jhr@nic.in

The Principal Secretary/ Secretary  
Ground Water Directorate, Karnataka  
prs-mi@karnataka.gov.in, osd.misection123@gmail.com

The Principal Secretary/ Secretary  
Ground Water Department, Govt. of Kerala, Kerala  
acs.wrd@kerala.gov.in

The Principal Secretary/ Secretary  
Public Works Department, UT of Lakshadweep, Lakshadweep  
lk-advisor@gov.in

The Principal Secretary/ Secretary  
Water Resources Department, Madhya Pradesh  
pswrd@mp.gov.in

The Principal Secretary/ Secretary  
Ground Water Survey And Development Agency (GSDA), Maharashtra  
psec.wssd@maharashtra.gov.in, wssd.ws15@mah.gov.in

The Principal Secretary/ Secretary  
Minor Irrigation Department, Manipur  
c\_arthur\_w@yahoo.com

The Principal Secretary/ Secretary  
Water Resources Department, Meghalaya  
drshakilp@gmail.com, drshakilp@rediffmail.com

The Principal Secretary/ Secretary  
Public Health Engineering Department (PHED), Mizoram  
phedmizoram@yahoo.com

The Principal Secretary/ Secretary  
Directorate of Geology and Mining, Nagaland  
klibanthunglotha@gmail.com

The Principal Secretary/ Secretary/ CEO  
Delhi Jal Board, NCT Delhi  
ceodelhi.djb@nic.in

The Principal Secretary/ Secretary  
Directorate of Ground Water Development, Odisha, Odisha  
wrsec.od@nic.in

The Principal Secretary/ Secretary  
Pondicherry Ground Water Authority, Puducherry  
secyagri.pon@nic.in

The Principal Secretary/ Secretary  
Water Resources Department, Punjab, Punjab  
psi@punjab.gov.in

The Additional Chief Secretary Principal Secretary/ Secretary  
Ground Water Department (GWD), Govt. of Rajasthan, Rajasthan  
acs.phed@rajasthan.gov.in

The Principal Secretary/ Secretary  
Water Resources Department, Sikkim  
kps42egmail.com

The Principal Secretary/ Secretary  
State Ground & Surface Water Resources Data Center, WRD, Tamil Nadu  
wrdssec@tn.gov.in, acswrdtn@gmail.com

The Principal Secretary/ Secretary  
Ground Water Department, Telangana  
secy-irg@telangana.gov.in, rajatkumar07@gmail.com

The Principal Secretary/ Secretary  
PWD (Water Resources), Tripura  
secretaryswse010422@gmail.com

The Principal Secretary/ Secretary  
Andaman Public Works Department, UT of Andaman & Nicobar Islands  
secypbmc@gmail.com

The Principal Secretary/ Secretary  
PHE/I&FC Department, UT of Ladakh  
pstocomsecutl@gmail.com

The Principal Secretary/ Secretary  
Namami Gange & Rural Water Supply, UP, Uttar Pradesh  
psrd.up@gmail.com  
psmigoup2016@gmail.com  
gwsec1@gmail.com

The Principal Secretary/ Secretary  
Uttarakhand Irrigation Department, Uttarakhand  
secy.pr.uk@gmail.com

The Principal Secretary/ Secretary  
State Water Investigation Directorate(SWID), WRID  
Govt. of West Bengal, West Bengal  
wridd.wb@gmail.com, secy.wridd-wb@nic.in

**By-Email****F.No. T-81011/77/2021 - GW Section-MOWR**

भारत सरकार

**Government of India**

जल शक्ति मंत्रालय

**Ministry of Jal Shakti**

जल संसाधन, नदी विकास और गंगा संरक्षण विभाग

**D/o WR, RD & GR****(भूजल अनुभाग / Ground Water Section)**

\*\*\*\*\*

Shram Shakti Bhawan, Rafi Marg  
New Delhi, Dated: 31/03/2023

To,

The Chief Secretaries/Administrators of all the States/UTs of India. (as per the Standard list)

**Subject:- Prevention of potential contamination of ground water from Rain Water Harvesting systems in Urban Areas - reg.**

Sir/ Madam,

I am directed to invite your kind attention towards Hon'ble NGT's observations, expressing concern over Rain Water Harvesting (RWH) system being one of the potential source of contamination of ground water in the country. The Principal Bench, Delhi of Hon'ble NGT, while disposing of matter related to societies in Dwarka area, Delhi (OA 147/2021), vide their order dated 10.12.2021 directed that *at many places where RWH systems are installed, the same are either not functional or resulting in contamination of ground water which situation needs to be remedied not only in Delhi but pan India. This may be urgently looked into by a joint Committee of CPCB, Ministry of Jal Shakti (MoJS) and Ministry of Urban Development, Government of India. MoJS will be the nodal agency for the purpose.*

2. In this regard, a Committee as per directions of Hon'ble NGT was constituted by this Department which visited selected RWH sites in 05 States i.e. Delhi, Haryana, Karnataka, Rajasthan and Tamil Nadu and submitted its report. The committee found that deficiency do exist in implementation of RWH system at certain places and due attention

L/82355/2023

was not given to possibility of contaminants breaching into the RWH system and eventually finding way into groundwater, particularly where the harvested water is directly used for Artificial Recharge (AR). From the report of the committee and their experience gained during site visits, it is quite likely that similar situations may exist in other States too. In view of this, a **guideline on RWH system and SoP with Do's and Dont's** as per **Annexure-I & Annexure-II** respectively are enclosed herewith.

3. It is requested to kindly direct/ instruct concerned Departments/agencies to strictly follow the guidelines including Do's & Dont's while implementing the RWH systems in your State. Further, the concerned Department/agency in the State may approach Regional Director Offices of Central Ground Water Board (CGWB) for technical guidance/support, if any.

4. This issues with the approval of the Competent Authority.

Yours sincerely,

**Signed by Rajendra Kumar Sahu**

**Date: 31-03-2023 18:00:55**

**Reason: Approved**

**(Rajendra Kumar Sahu)**

Under Secretary to the Govt. of India

Ph: 011-23766907

Email: **gwdesk-mowr@nic.in**

Copy to:

- i. Sr. PPS to Secretary, DoWR, RD & GR, MoJS
- ii. SPPS to Special Secretary, DoWR, RD & GR, MoJS
- iii. Sr PPS to AS&MD, NWM
- iv. PPS to JS(A,GW & IC), DoWR, RD & GR, MoJS
- v. Sr PPS to Secretary, MoH&UA
- vi. PPS to Chairman, CPCB
- vii. PPS to Chairman, CGWB

**Annexure-I**

- i. The Committee recommended to give stress on contamination

J/82355/2023

- aspect while designing and implementing the RWH systems and suggested for strictly adhering to the **BIS Standard - IS 15797:2008 (for implementation of Roof Top Rain Water Harvesting System in the country)** which is a very comprehensive document (a copy is enclosed for ready reference). Section 6.5 of the document deals with general 'Management and Maintenance' of the system and Section 7.4 specifically tells about 'Management of Catchment Area, Drains and Recharge Structures'. Section 7 provides designs of AR structures suitable at various different situations.
- ii. It has also been suggested to avoid Rain Water Harvesting System for the purpose of Artificial Recharge in certain urban areas especially in congested places in the vicinity of sewerage system components/ landfill sites etc where chances of contamination are high through mingling of untreated sewerage water/domestic wastes.
  - iii. The Committee has further suggested that in case of small households, cluster based RWH system should be promoted in place of individual household schemes.
  - iv. States may promote incentivization for adopting RWH, either in the form of rebate or subsidy in water-stressed areas.
  - v. Large-scale RWH system, such as those in large industrial, residential and commercial complexes, should have piezometer(s) installed at appropriate site(s) for periodic monitoring of water level and water quality. These parameters are the most important and reliable indicators of functioning status and health of RWH system.
  - vi. The design of RWH should by-pass first roof top harvested rainwater. Mixing of drain water with rooftop run off or with runoff from paved areas, where vehicular movement takes place, should be prevented.
  - vii. As water quality may not be strictly checked, the water stored in harvesting structures may be used strictly for non-potable purposes.
  - viii. Concept like RWH Theme Park, Bengaluru may be promoted for proper guidance to general public/ individual households.
  - ix. All RWH sites should be geo-tagged for better visibility for monitoring purpose.
  - x. There should be mechanism to avoid misuse of the recharge tube-wells for pumping purposes.
  - xi. Suitable online filters can be considered in the pipeline to avoid minor contaminants, if any, while harvesting the rooftop rainwater to the recharge tube-wells.
  - xii. District Jal Shakti Kendras may be strengthened and general public may be sensitised to follow correct RWH system through regular awareness generation by means of mass media, print media etc.
  - xiii. District administration may randomly check few RWH sites on monthly basis and suitable directions/corrective action may be suggested to the owner(s) of the RWH system(s) and the same may be followed up for strict implementation post inspection.

Annexure-II

J/82355/2023

## DOS AND DON'TS WHILE IMPLEMENTING ROOF TOP RAIN WATER HARVESTING AND ARTIFICIAL RECHARGE

### A. While Planning Implementation of Scheme/ Construction of Structures

#### Dos

- **Choose the right recharge technique:** RWH schemes should have Artificial Recharge provisions depending upon local hydrogeological/ site-specific conditions. In this regard, the BIS Standard - IS 15797:2008, for implementation of Roof Top Rain Water Harvesting System may be referred to. Section 7 provides designs of AR structures suitable to different situations.
- **Source Water:** Only non-polluted rainwater from the roof tops and other catchment areas has to be diverted to recharge structure through connection of downpipe.
- **RWH/ AR Sites at Safe Distance:** Depending upon groundwater flow direction, RWH/AR sites should be located at safe distance from possible contaminant source such as sewage drains/ landfill sites/ cesspool/ sewage system having hydrogeological connectivity with the aquifer.
- **Insulation from Possible Contaminant Source:** There should be proper arrangements in place to prevent sewage water or contaminated water from paved area from mixing into run-off/ recharged water.
- **Provision of Filters:** There should be proper mechanism to let the water pass through filter media before entering into recharge system in order to minimize the possibility of aquifer material getting choked. Online filters (filters fitted in pipelines carrying roof top water) can also be used to avoid minor contaminants, if any, for diverting the rooftop rainwater to the recharge tubewells.
- **Provision for By-pass of First Flush:** RWH system should be designed in a way to allow by-pass first flush (first rainwater).
- **Provision for pre-treatment of water:** The Water should be pre-treated to remove suspended solids, organic matter, and other contaminants before recharge. This will help prevent clogging of the recharge structure and protect the groundwater quality.
- **Dual pipe system for utilization of harvested water:** Dual pipe system should be installed for utilization of harvested water for non-potable purposes, i.e other than drinking, cooking and bathing.
- **Cluster-based RWH System:** In the areas of only small households, cluster-based RWH system should be promoted in place of individual household scheme.
- **Installation of Piezometers:** Large-scale RWH system, such as those in large residential and commercial complexes, should have piezometer(s) installed at appropriate site(s) for periodic monitoring of water level and water quality. These parameters are the most important and reliable indicators of functioning status and health of RWH system.
- **Geotagging of RWH/ AR Sites:** All RWH/ AR sites should be geo-tagged for better visibility for monitoring purpose.

J/82355/2023

**Don'ts**

- It is better to avoid RWH/ AR in areas having shallow ground water levels (say shallower than 5 metre below ground level (mbgl)).
- Recharge should be avoided in areas where there is possibility of contamination of groundwater. RTRWH with AR in buildings such as hospital buildings may be avoided. In such cases storage of rainwater for non-potable uses should be encouraged.
- There should be no mixing of drain water with rooftop run off.
- Run-off from paved area having vehicular movement should not be diverted towards RWH system.
- RWH/ AR sites should not be located in the vicinity of possible contaminant source such as sewage drains/ landfill sites/ cesspool/ sewage system having hydrogeological connectivity with the aquifer.
- Contaminated water should not be recharged as it can pollute the groundwater and make it unfit for human consumption.
- Domestic waste water should not be diverted directly to Recharge Pits, particularly in areas where water levels are shallow.
- Recharge wells should not be constructed beyond water level. Direct recharging below water level should not be done.
- Recharge structures should not be constructed in areas prone to flooding as they can be damaged or washed away during heavy rains.
- Recharge should not be unplanned. Unplanned recharge can lead to groundwater contamination, soil erosion, and other environmental problems.

**B. Maintenance and Monitoring of RWH/ AR System**

Maintenance of recharge structures is important to ensure their long-term effectiveness and sustainability. Here are some key maintenance practices that can help keep recharge structures functioning properly.

- First flush should be by-passed.
- Rooftops should be cleaned regularly.
- Filter material should be regularly cleaned/ replaced.
- Sediment and debris can accumulate in recharge structures over time, which can clog the pores and reduce the infiltration capacity. Regular cleaning can prevent clogging and help maintain the recharge capacity of the structure
- Regular monitoring and inspection of recharge structures can help detect any signs of damage, erosion, or clogging or damage early on, before they become more serious. This can include checking for cracks or damage to the structure, as well as monitoring the inflow and outflow of water.
- Water level and groundwater quality around the recharge structure should be regularly monitored through purpose-built piezometers.
- Monitoring mechanism should be effective through involvement of officials trained to evaluate functioning of installed RWH system as per BIS.
- Any damage or erosion to the recharge structure should be repaired immediately to prevent further damage. For example, if a recharge well has a

I/82355/2023

crack or a hole, it should be repaired as soon as possible to prevent soil from entering the well and clogging it. Prompt repair and maintenance can help prevent further damage and ensure the long-term effectiveness of the recharge structure.

- Vegetation can grow around recharge structures and block the inflow of water. Regular trimming of vegetation can help maintain the flow of water into the recharge structure.
- Keep a record of maintenance activities and observations for each recharge structure. This can help identify patterns or trends in maintenance needs and guide future maintenance activities.

**Don'ts**

- Do not dump pollutants or waste near or inside the RWH/ AR structure.
- Never leave the covers of RWH chamber/ AR structures open.
- Do not allow wastewater to flow towards RWH/ AR structures.

**C. Other Suggestions**

- Underground Storage tank/ sump, made using cross-wave technology or uPVC pipes saves space, besides providing strength to the structure. As it is costly, the technology may be used in large Government Buildings, commercial complexes and industrial premises.
- In the new buildings, the complex is divided in a way to have alternate bays for sewage and RWH channels.

भारतीय मानक

छतों पर वर्षा जल संग्रहण — मार्गदर्शी सिद्धान्त

*Indian Standard*

ROOF TOP RAINWATER  
HARVESTING — GUIDELINES

ICS 13.060.10

© BIS 2008

**BUREAU OF INDIAN STANDARDS**  
MANAK BHAVAN, 9 BHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

**FOREWORD**

This Indian Standard was adopted by the Bureau of Indian Standards, after the draft finalized by the Ground Water and Related Investigations Sectional Committee had been approved by the Water Resources Division Council.

Rainwater harvesting is an option which has been adopted in many parts of the world where due to increase in population conventional water supply system has failed to meet the needs of the people. The term 'Water Harvesting' connotes collection and storage of rainwater and also other activities aimed at harvesting surface water, prevention of loss through evaporation and seepage.

Natural recharge to ground water has reduced due to shrinkage of open area consequent to increased urban activities. Ground water levels have registered a marked decline, unplanned disposal of waste has resulted in deterioration of ground water quality. In view of the gap between demand and supply there is an utmost need for adopting roof top rainwater harvesting and augmenting ground water storage.

The composition of the Committee responsible for the formulation of this standard is given in Annex A.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

*Indian Standard***ROOF TOP RAINWATER  
HARVESTING — GUIDELINES****1 SCOPE**

This standard lays down guidelines for roof top rainwater harvesting.

**2 REFERENCE**

The following standard contains provision, which through reference in this text constitutes provision of this standard. At the time of publication, the edition indicated was valid. All standards are subject to revision and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of the standard given below:

| <i>IS No.</i>            | <i>Title</i>  |
|--------------------------|---|
| 14476 (Part 6) :<br>1998 | Test pumping of water wells — Code<br>of practice: Part 6 Special tests |

**3 GENERAL**

Roof top rainwater collection is one of the solutions for solving or reducing the problem of water availability, where there is inadequate ground water supply and surface sources are either lacking or insignificant. In this system, rainwater falling on roofs of houses and other buildings is collected through a system of pipes and semi-circular channels of galvanized iron or PVC and stored in tanks suitably located on the ground or underground for direct use or for recharging ground water aquifers. Urban housing complexes/residential buildings and institutional buildings have large roof area and are amendable for rainwater harvesting. This practice is in vogue at the individual household level in remote hilly areas with high rainfall and in some semi-arid areas in the plains.

**4 ADVANTAGES OF ROOF TOP RAINWATER HARVESTING**

- a) One of the appropriate options for augmenting ground water recharge/storage in urban areas, where natural recharge has been considerably reduced due to increased urban activities and not much land is available for implementing any other artificial recharge measure. In rural areas also, roof top rainwater harvesting can supplement the domestic requirements.
- b) Rainwater runoff, which otherwise flows through sewers and storm drains and is wasted, can be harvested and utilized.

- c) Helps in reducing the frequent drainage congestion in urban areas where fast rate of urbanization has reduced availability of open surfaces.
- d) Recharging of aquifers with harvested water improves the quality of ground water through dilution.
- e) The harnessed rainwater can be utilized when needed at the time and place of scarcity.
- f) The structures required for harvesting are simple, economical and Eco-friendly.
- g) In coastal areas over extraction of ground water leads to saline water ingress. Therefore, recharging of ground water aquifer in such areas helps to control saline water ingress.
- h) Storing of harvested water under ground through aquifer recharge, wherever feasible, is advantageous as such storage is not exposed to evaporation and pollution. Aquifers serve as a distribution system as well supplying water when required.

**5 FACTORS DETERMINING TYPE/SYSTEM OF RAINWATER HARVESTING**

5.0 There are many factors that determine the total quantity of rainwater that can be harvested in a particular area and the system that would be appropriate for efficiently harvesting this quantity. Some of these are given in 5.1 to 5.5.

**5.1 Rainfall Quantity**

The total volume of rainwater available from any roof top surface is a product of total rainfall and the surface area of collection. A runoff coefficient is usually applied to account for infiltration, evaporation and other losses and it varies from 0.8 to 0.95. In order to estimate the average annual/monsoon runoff from rooftop area in any location, the average annual/monsoon rainfall data for the location need to be used and using Tables 1 and 2, the water availability for flat and sloping roof can be worked out.

**5.2 Rainfall Pattern**

Rainfall pattern as well as total rainfall, will often determine the feasibility of a rainwater harvesting system. In areas where rainfall occurs regularly in most parts throughout the year, implies that the storage requirement is low and hence the system cost will be

**Table 1 Water Availability for a Given Roof Top Area and Rainfall (For Flat Roofs)**  
(Clause 5.1)

| Sl No. | Roof Top Area m <sup>2</sup> | Rainfall, mm |      |      |      |       |       |       |       |       |       |       |       |       |
|--------|------------------------------|--------------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        |                              | 100          | 200  | 300  | 400  | 500   | 600   | 800   | 1 000 | 1 200 | 1 400 | 1 600 | 1 800 | 2 000 |
| (1)    | (2)                          | (3)          | (4)  | (5)  | (6)  | (7)   | (8)   | (9)   | (10)  | (11)  | (12)  | (13)  | (14)  | (15)  |
| i)     | 20                           | 1.6          | 3.2  | 4.8  | 6.4  | 8     | 9.6   | 12.8  | 16    | 19.2  | 22.4  | 25.6  | 28.8  | 32    |
| ii)    | 30                           | 2.4          | 4.8  | 7.2  | 9.6  | 12    | 14.4  | 19.2  | 24    | 28.8  | 33.6  | 38.4  | 43.2  | 48    |
| iii)   | 40                           | 3.2          | 6.4  | 9.6  | 12.8 | 16    | 19.2  | 25.6  | 32    | 38.4  | 44.8  | 51.2  | 57.6  | 64    |
| iv)    | 50                           | 4            | 8    | 12   | 16   | 20    | 24    | 32    | 40    | 48    | 56    | 64    | 72    | 80    |
| v)     | 60                           | 4.8          | 9.6  | 14.4 | 19.2 | 24    | 28.8  | 38.4  | 48    | 57.6  | 67.2  | 76.8  | 86.4  | 96    |
| vi)    | 70                           | 5.6          | 11.2 | 16.8 | 22.4 | 28    | 33.6  | 44.8  | 56    | 67.2  | 78.4  | 89.6  | 100.8 | 112   |
| vii)   | 80                           | 6.4          | 12.8 | 19.2 | 25.6 | 32    | 38.4  | 51.2  | 64    | 76.8  | 89.6  | 102.4 | 115.2 | 128   |
| viii)  | 90                           | 7.2          | 14.4 | 21.6 | 28.8 | 36    | 43.2  | 57.6  | 72    | 86.4  | 100.8 | 115.2 | 129.6 | 144   |
| ix)    | 100                          | 8            | 16   | 24   | 32   | 40    | 48    | 64    | 80    | 96    | 112   | 128   | 144   | 160   |
| x)     | 150                          | 12           | 24   | 36   | 48   | 60    | 72    | 96    | 120   | 144   | 168   | 192   | 216   | 240   |
| xi)    | 200                          | 16           | 32   | 48   | 64   | 80    | 96    | 128   | 160   | 192   | 224   | 256   | 288   | 320   |
| xii)   | 250                          | 20           | 40   | 60   | 80   | 100   | 120   | 160   | 200   | 240   | 280   | 320   | 360   | 400   |
| xiii)  | 300                          | 24           | 48   | 72   | 96   | 120   | 144   | 192   | 240   | 288   | 336   | 384   | 432   | 480   |
| xiv)   | 400                          | 32           | 64   | 96   | 128  | 160   | 192   | 256   | 320   | 384   | 448   | 512   | 576   | 640   |
| xv)    | 500                          | 40           | 80   | 120  | 160  | 200   | 240   | 320   | 400   | 480   | 560   | 640   | 720   | 800   |
| xvi)   | 1 000                        | 80           | 160  | 240  | 320  | 400   | 480   | 640   | 800   | 960   | 1 120 | 1 280 | 1 440 | 1 600 |
| xvii)  | 2 000                        | 160          | 320  | 480  | 640  | 800   | 960   | 1 280 | 1 600 | 1 920 | 2 240 | 2 560 | 2 880 | 3 200 |
| xviii) | 3 000                        | 240          | 480  | 720  | 960  | 1 200 | 1 440 | 1 920 | 2 400 | 2 880 | 3 360 | 3 840 | 4 320 | 4 800 |

**Table 2 Water Availability for a Given Roof Top Area and Rainfall (For Sloping Roofs)**  
(Clause 5.1)

| Sl No. | Roof Top Area m <sup>2</sup> | Rainfall, mm |      |      |       |       |       |       |       |       |       |       |       |       |
|--------|------------------------------|--------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        |                              | 100          | 200  | 300  | 400   | 500   | 600   | 800   | 1 000 | 1 200 | 1 400 | 1 600 | 1 800 | 2 000 |
| (1)    | (2)                          | (3)          | (4)  | (5)  | (6)   | (7)   | (8)   | (9)   | (10)  | (11)  | (12)  | (13)  | (14)  | (15)  |
| i)     | 20                           | 1.9          | 3.8  | 5.7  | 7.6   | 9.5   | 11.4  | 15.2  | 19    | 22.8  | 26.6  | 30.4  | 34.2  | 38    |
| ii)    | 30                           | 2.9          | 5.7  | 8.6  | 11.4  | 14.3  | 17.1  | 22.8  | 28.5  | 34.2  | 39.9  | 45.6  | 51.3  | 57    |
| iii)   | 40                           | 3.8          | 7.6  | 11.4 | 15.2  | 19    | 22.8  | 30.4  | 38    | 45.6  | 53.2  | 60.8  | 68.4  | 76    |
| iv)    | 50                           | 4.8          | 9.5  | 14.3 | 19    | 23.8  | 28.5  | 38    | 47.5  | 57    | 66.5  | 76    | 85.5  | 95    |
| v)     | 60                           | 5.7          | 11.4 | 17.1 | 22.8  | 28.5  | 34.2  | 45.6  | 57    | 68.4  | 79.8  | 91.2  | 102.6 | 114   |
| vi)    | 70                           | 6.7          | 13.3 | 20.0 | 26.6  | 33.3  | 39.9  | 53.2  | 66.5  | 79.8  | 93.1  | 106.4 | 119.7 | 133   |
| vii)   | 80                           | 7.6          | 15.2 | 22.8 | 30.4  | 38    | 45.6  | 60.8  | 76    | 91.2  | 106.4 | 121.6 | 136.8 | 152   |
| viii)  | 90                           | 8.6          | 17.1 | 25.7 | 34.2  | 42.8  | 51.3  | 68.4  | 85.5  | 102.6 | 119.7 | 136.8 | 153.9 | 171   |
| ix)    | 100                          | 9.5          | 19   | 28.5 | 38    | 47.5  | 57    | 76    | 95    | 114   | 133   | 152   | 171   | 190   |
| x)     | 150                          | 14.3         | 28.5 | 42.8 | 57    | 71.3  | 85.5  | 114   | 142.5 | 171   | 199.5 | 228   | 256.5 | 285   |
| xi)    | 200                          | 19           | 38   | 57   | 76    | 95    | 114   | 152   | 190   | 228   | 266   | 304   | 342   | 380   |
| xii)   | 250                          | 23.8         | 47.5 | 71.3 | 95    | 118.8 | 142.5 | 190   | 237.5 | 285   | 332.5 | 380   | 427.5 | 475   |
| xiii)  | 300                          | 28.5         | 57   | 85.5 | 114   | 142.5 | 171   | 228   | 285   | 342   | 399   | 456   | 513   | 570   |
| xiv)   | 400                          | 38           | 76   | 114  | 152   | 190   | 228   | 304   | 380   | 456   | 532   | 608   | 684   | 760   |
| xv)    | 500                          | 47.5         | 95   | 143  | 190   | 237.5 | 285   | 380   | 475   | 570   | 665   | 760   | 855   | 950   |
| xvi)   | 1 000                        | 95           | 190  | 285  | 380   | 475   | 570   | 760   | 950   | 1 140 | 1 330 | 1 520 | 1 710 | 1 900 |
| xvii)  | 2 000                        | 190          | 380  | 570  | 760   | 950   | 1 140 | 1 520 | 1 900 | 2 280 | 2 660 | 3 040 | 3 420 | 3 800 |
| xviii) | 3 000                        | 285          | 570  | 855  | 1 140 | 1 425 | 1 710 | 2 280 | 2 850 | 3 420 | 3 990 | 4 560 | 5 130 | 5 700 |

correspondingly low and *vice versa*. Conversely, areas where total rainfall occurs during 1-2 months, the water collected during the monsoon has to be stored for use in remaining months throughout the year, which requires large storage structures as well as arrangement for some treatment.

### 5.3 Intensity of Rainfall

The maximum intensity of rainfall will decide the peak flow, which is to be harvested and depending upon the peak flow, the gutter size for sloping roof and diameter of drainage pipe has to be calculated.

### 5.4 Collection Surface Area

For roof top rainwater harvesting, the collection area is restricted by the size of the roof of the dwelling unit. Sometimes other surfaces such as terrace, balconies and other projections are used to supplement the roof top collection area.

### 5.5 Storage Capacity

The storage tank is usually the most expensive component of rainwater harvesting system. Hence a careful analysis is required for design of storage tank capacity.

## 6 STORAGE OF WATER IN A STORAGE TANK FOR DIRECT USE

### 6.1 Design of System Components

A roof top catchment system has three main components, namely, a roof, a guttering and first flush device and a storage tank:

- a) *Roof* — In this system, only roof top is the catchment as shown in Fig. 1 and Fig. 2. The roofing should be of galvanized iron sheets (G.I.), aluminium, clay tiles, asbestos or

concrete. In case of thatch-roof, it may be covered with waterproof LDPE sheeting. The roof should be smooth, made of non-toxic material sufficiently large to fill the tank with the available rainfall conditions. Existing roofs of houses and public buildings can be used for a roof top catchment system. In some cases enlarged or additional roofed structures can be built.

- b) *Guttering and First-Flush Device* — Guttering is intended to protect the building by collecting the water running of the roof and direct it, via a downpipe, to the storage tank. Gutter is provided along the edge of the roof. It is fixed with a gentle slope towards downpipe, which is meant for free flow of water to the storage tank. This may be made up of G.I. sheet, wood, bamboo or any other locally available material. The downpipe used should be at least 100 mm diameter and be provided with a 20 mesh wire screen at the inlet to prevent dry leaves and other debris from entering it. The gutter size may be worked out using any standard formula of hydraulics or using Table 3.



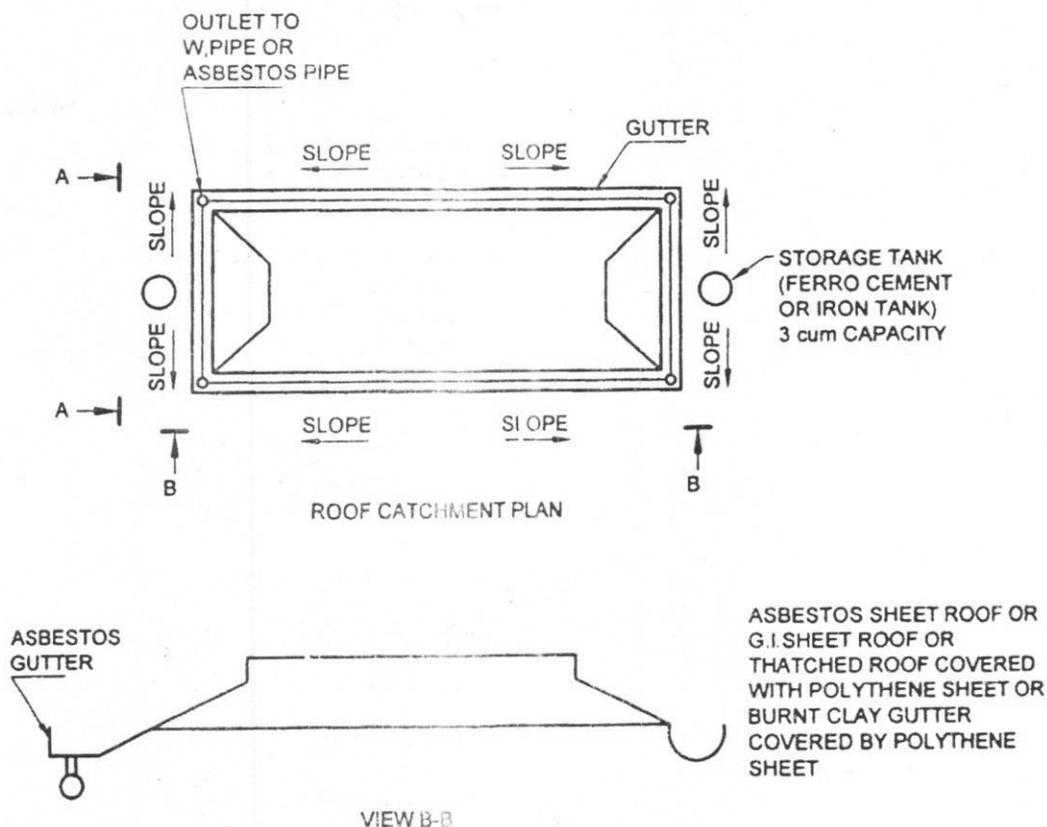


FIG. 1 RAINWATER HARVESTING SYSTEM

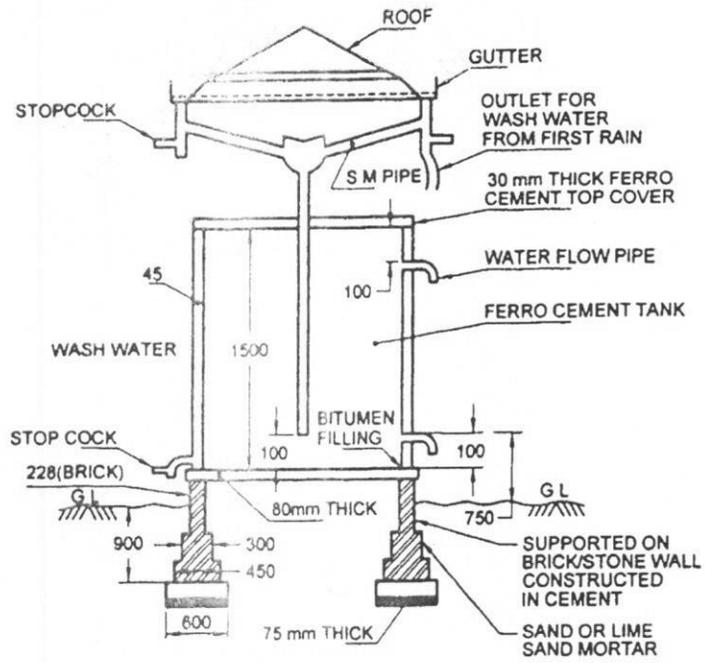

WATER TANK ABOVE GROUND

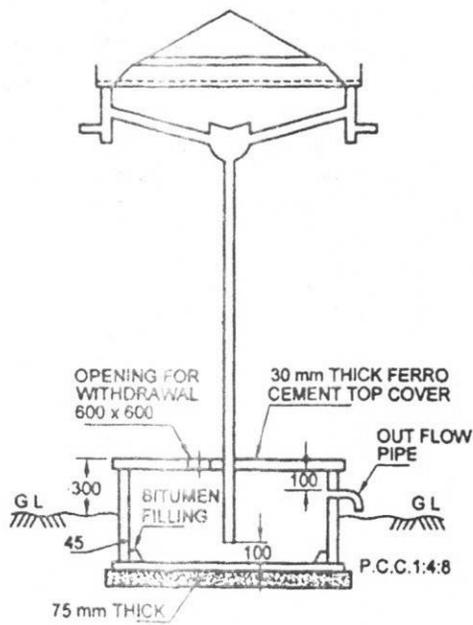

WATER TANK UNDER GROUND

All dimensions in millimetres.

FIG. 2 RAINWATER HARVESTING STRUCTURES

Table 3 Diameter of Gutter and Width of G.I. Sheet

[Clause 6.1(b)]

| Sl No. | Roof Top Area<br>m <sup>2</sup> | Rainfall Intensity, mm h                                 |     |     |     |     |     |     |      |      |      |      |      |      |      |      |
|--------|---------------------------------|--|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|
|        |                                 | 10   | 15  | 20  | 25  | 30  | 35  | 40  | 45   | 50   | 60   | 70   | 80   | 90   | 100  |      |
|        |                                 | Diameter (D) of Channel and Width (W) of G.I. Sheet (mm) |     |     |     |     |     |     |      |      |      |      |      |      |      |      |
| (1)    | (2)                             | (3)  | (4) | (5) | (6) | (7) | (8) | (9) | (10) | (11) | (12) | (13) | (14) | (15) | (16) | (17) |
| i)     | 10                              | D  | 20  | 23  | 26  | 28  | 30  | 32  | 33   | 35   | 36   | 39   | 41   | 43   | 45   | 47   |
|        |                                 | W  | 51  | 56  | 60  | 64  | 67  | 70  | 72   | 74   | 77   | 81   | 84   | 88   | 91   | 93   |
| ii)    | 20                              | D  | 26  | 30  | 33  | 36  | 39  | 41  | 43   | 45   | 47   | 50   | 53   | 56   | 58   | 61   |
|        |                                 | W  | 60  | 67  | 72  | 77  | 81  | 84  | 88   | 91   | 93   | 99   | 103  | 108  | 112  | 115  |
| iii)   | 30                              | D  | 30  | 35  | 39  | 42  | 45  | 48  | 50   | 52   | 54   | 58   | 62   | 65   | 68   | 71   |
|        |                                 | W  | 67  | 74  | 81  | 86  | 91  | 95  | 99   | 102  | 106  | 112  | 117  | 122  | 127  | 131  |
| iv)    | 40                              | D  | 33  | 39  | 43  | 47  | 50  | 53  | 56   | 58   | 61   | 65   | 69   | 72   | 76   | 79   |
|        |                                 | W  | 72  | 81  | 88  | 93  | 99  | 103 | 108  | 112  | 115  | 122  | 128  | 134  | 139  | 144  |
| v)     | 50                              | D  | 36  | 42  | 47  | 51  | 54  | 58  | 61   | 63   | 66   | 71   | 75   | 79   | 82   | 86   |
|        |                                 | W  | 77  | 86  | 93  | 100 | 106 | 111 | 115  | 120  | 124  | 131  | 138  | 144  | 149  | 154  |
| vi)    | 60                              | D  | 39  | 45  | 50  | 54  | 58  | 62  | 65   | 68   | 71   | 76   | 80   | 84   | 88   | 92   |
|        |                                 | W  | 81  | 91  | 99  | 106 | 112 | 117 | 122  | 127  | 131  | 139  | 146  | 152  | 158  | 164  |
| vii)   | 70                              | D  | 41  | 48  | 53  | 58  | 62  | 65  | 69   | 72   | 75   | 80   | 85   | 89   | 93   | 97   |
|        |                                 | W  | 84  | 95  | 103 | 111 | 117 | 123 | 128  | 133  | 138  | 146  | 153  | 160  | 167  | 172  |
| viii)  | 80                              | D  | 43  | 50  | 56  | 61  | 65  | 69  | 72   | 76   | 79   | 84   | 89   | 94   | 98   | 102  |
|        |                                 | W  | 88  | 99  | 108 | 115 | 122 | 128 | 134  | 139  | 144  | 152  | 160  | 167  | 174  | 180  |
| ix)    | 90                              | D  | 45  | 52  | 58  | 63  | 68  | 72  | 76   | 79   | 82   | 88   | 93   | 98   | 102  | 107  |
|        |                                 | W  | 91  | 102 | 112 | 120 | 127 | 133 | 139  | 144  | 149  | 158  | 167  | 174  | 181  | 188  |
| x)     | 100                             | D  | 47  | 54  | 61  | 66  | 71  | 75  | 79   | 82   | 86   | 92   | 97   | 102  | 107  | 111  |
|        |                                 | W  | 93  | 106 | 115 | 124 | 131 | 138 | 144  | 149  | 154  | 164  | 172  | 180  | 188  | 194  |
| xi)    | 150                             | D  | 54  | 63  | 71  | 77  | 82  | 87  | 92   | 96   | 100  | 107  | 113  | 119  | 124  | 129  |
|        |                                 | W  | 106 | 120 | 131 | 141 | 149 | 157 | 164  | 170  | 176  | 188  | 197  | 207  | 215  | 223  |
| xii)   | 200                             | D  | 61  | 71  | 79  | 86  | 92  | 97  | 102  | 107  | 111  | 119  | 126  | 132  | 138  | 144  |
|        |                                 | W  | 115 | 131 | 144 | 154 | 164 | 172 | 180  | 188  | 194  | 207  | 218  | 228  | 237  | 246  |
| xiii)  | 250                             | D  | 66  | 77  | 86  | 93  | 100 | 105 | 111  | 116  | 121  | 129  | 137  | 144  | 150  | 156  |
|        |                                 | W  | 124 | 141 | 154 | 166 | 176 | 186 | 194  | 202  | 209  | 223  | 235  | 246  | 256  | 266  |
| xiv)   | 300                             | D  | 71  | 82  | 92  | 100 | 107 | 113 | 119  | 124  | 129  | 138  | 146  | 154  | 161  | 167  |
|        |                                 | W  | 131 | 149 | 164 | 176 | 188 | 197 | 207  | 215  | 223  | 237  | 250  | 262  | 273  | 283  |
| xv)    | 400                             | D  | 79  | 92  | 102 | 111 | 119 | 126 | 132  | 138  | 144  | 154  | 163  | 172  | 179  | 186  |
|        |                                 | W  | 144 | 164 | 180 | 194 | 207 | 218 | 228  | 237  | 246  | 262  | 276  | 290  | 302  | 313  |
| xvi)   | 500                             | D  | 86  | 100 | 111 | 121 | 129 | 137 | 144  | 150  | 156  | 167  | 177  | 186  | 195  | 203  |
|        |                                 | W  | 154 | 176 | 194 | 209 | 223 | 235 | 246  | 256  | 266  | 283  | 299  | 313  | 326  | 339  |
| xvii)  | 1 000                           | D  | 111 | 129 | 144 | 156 | 167 | 177 | 186  | 195  | 203  | 217  | 230  | 242  | 253  | 263  |
|        |                                 | W  | 194 | 223 | 246 | 266 | 283 | 299 | 313  | 326  | 339  | 361  | 381  | 400  | 417  | 433  |
| xviii) | 2 000                           | D  | 144 | 167 | 186 | 203 | 217 | 230 | 242  | 253  | 263  | 282  | 298  | 314  | 328  | 341  |
|        |                                 | W  | 246 | 283 | 313 | 339 | 361 | 381 | 400  | 417  | 433  | 462  | 489  | 513  | 535  | 556  |
| xviii) | 3 000                           | D  | 167 | 195 | 217 | 236 | 253 | 268 | 282  | 294  | 306  | 328  | 347  | 365  | 382  | 397  |
|        |                                 | W  | 283 | 326 | 361 | 391 | 417 | 441 | 462  | 482  | 501  | 535  | 566  | 594  | 620  | 644  |

## NOTES

- 1 Provide minimum diameter of channel of 100 mm and width of sheet 176 mm.
- 2 Diameter to be limited to 300 mm and width of sheet  $\geq 10$  mm.

For all tanks having roof catchment, the first runoff of rainwater from the roof should be discarded. This helps keep the water potable because this first flush contains large quantities of dust, leaves and other impurities. This can also be prevented by installation of a gate valve at the end of down pipe at ground level.

- c) **Tank** — Storage tank can be constructed underground or above ground. The

underground tank may be of masonry or R.C.C. structure suitably lined with water proofing materials. The surface tank may be of G.I. Sheet, R.C.C., Plastic/HDP or Ferrocement Tank placed at elevation on a raised platform as shown in Fig. 3. Choice of the tank depends on locally available materials and space available. When the tank is constructed underground, at least 30 cm of the tank should remain above ground. Water

tanks using ferrocement technology come in different designs with volumes ranging between 2 m<sup>3</sup> and 200 m<sup>3</sup>. For example, a free standing cylindrical tank can be built in sizes between 10 m<sup>3</sup> and 30 m<sup>3</sup>, while a capacity of up to 200 m<sup>3</sup> is possible with sub-surface covered tanks. The latter is economical when the capacity exceeds 50 m<sup>3</sup>.

An alternate design, avoiding framework, involves erecting a circular frame made of welded-mesh bars spaced at 15 cm and covered with chicken wire mesh (2.5 cm gauge) onto a reinforced concrete base. This is then covered on the outside with sacks or cloth and two coats of a 1.5 cm layer of mortar (1 part cement, 3 parts sand) and plastered along the inner walls to produce the tank wall. Two further coats of plaster are added, one on the outside after removing the sacks and one on the inside to provide a tank wall thickness of 5 cm. A waterproof coat of cement and water is then added to the tank's inner wall.

When the wall is complete, a wooden frame is constructed inside the tank to support the metal template made from old oil drums, which forms the mould for the domed roof. The roof is also reinforced with welded-mesh and chicken wire. For quality, the floor, walls and the roof need to be cured by moistening their surface for at least a week. This should start immediately after each component is ready.

To facilitate cleaning of the tank, an outlet pipe may be fitted and fixed in the tank at bottom level. The size of the tank will depend upon the factors such as daily demand, duration of dry spell, catchment area and rainfall.

The tank is provided with:

- a) A manhole of 0.60 m × 0.60 m size with cover,
- b) Vent pipe/overflow pipe of 100 mm diameter, and
- c) Drain pipe of 100 mm diameter at bottom.

The withdrawal of water from the underground tank is

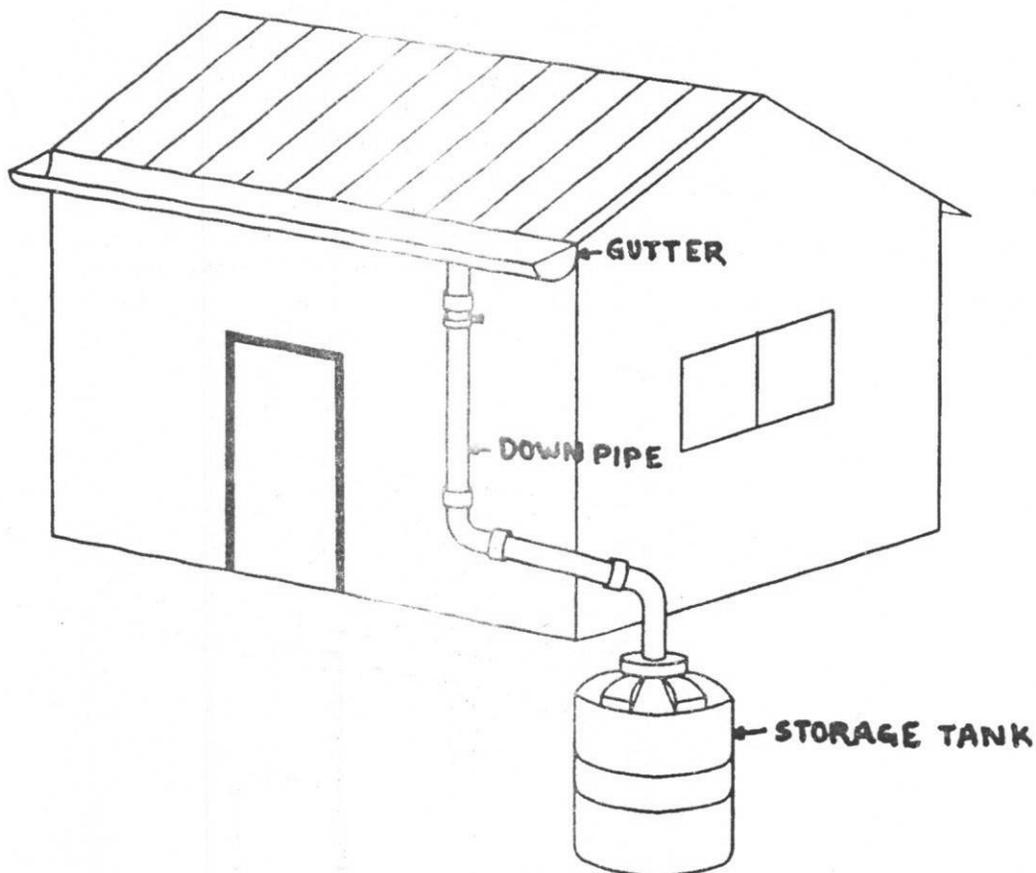


FIG. 3 STORAGE OF RAINWATER IN A HDPE TANK

done by installing a hand pump . In case of surface tank, taps may be provided. The overflow pipe should be connected to a drain/recharge pit.

Before the tank is put into use it should be thoroughly cleaned and disinfected with high dosage of chlorine. Since the water should remain stored for quite a long time, periodical disinfection of stored water is essential to prevent growth of pathogenic bacteria.

### 6.2 Site Assessment

Assessing the site conditions is the first step towards a sound system design. The five main site conditions to be assessed are:

- a) Availability of suitable roof catchment,
- b) Foundation characteristics of soil near the house,
- c) Location of trees,
- d) Estimated runoff to be captured per unit area of the roof, and
- e) Availability and location of construction material.

### 6.3 Estimating the Size of the Required System

The size of the catchment area and tank should be enough to supply sufficient water for the users during the dry period. Assuming a full tank at the beginning of the dry season (and knowing the average length of the dry season and the average water use), the volume of the tank can be calculated by the following formula:

$$V = t \times n \times q$$

where

- $V$  = volume of tank, in litres;  
 $t$  = length of the dry season (days);  
 $n$  = number of people using the tank; and  
 $q$  = consumption in litres per capita per day.

If, for example, 20 lpd ( $q$ ) is agreed upon and a dry period of 100 days ( $t$ ) is normally not exceeded, a storage volume of 10 m<sup>3</sup> would be required for a family of 5 members ( $n$ ).

$$V = 100 (t) \times 5 (n) \times 20 (q) = 10\,000 \text{ litre or } 10 \text{ m}^3$$

The required catchment area (that is the area of the roof) can be determined by dividing the volume of the tank by the accumulated average rainfall volume (in litres) per unit area (in m<sup>2</sup>) over the preceding wet months and multiplying this with the runoff coefficient, which varies from 0.8 to 0.95 depending upon type of roof.

### 6.4 General Design Features

Roof top water harvesting systems can provide good

quality potable water, if the design features outlined below are taken into account:

- a) The substances that go into the making of the roof should be non-toxic and chemically inert.
- b) Roof surfaces should be smooth, hard and dense since they are easier to clean and are less likely to be damaged and release materials/fibres into the water.
- c) Roof painting is not advisable since most paints contain toxic substances and may peel off.
- d) No overhanging trees should be left near the roof.
- e) Nesting of birds on the roof should be prevented.
- f) All gutter ends should be fitted with a wire mesh screen to keep out leaves, etc.
- g) Appropriate arrangement for discarding the first flow of rainfall should be made.
- h) A hygienic soak away channel should be built at water outlets and a screened overflow pipe should be provided.
- j) The storage tank should have a tight fitting roof that excludes light, a manhole cover and a flushing pipe at the base of the tank (for standing tanks).
- k) There should be a reliable sanitary extraction device such as a gravity tap or a hand pump to avoid contamination of the water in the tank.
- m) There should be no possibility of contaminated wastewater flowing into the tank (especially for tanks installed at ground level).
- n) Water from other sources, unless it is a reliable source, should not be emptied into the tank through pipe connections or the manhole cover.

### 6.5 Management and Maintenance

Roof top catchment tanks, like all water supply systems, demand periodic management and maintenance to ensure reliable and quality water supply. If the various components of the system are not regularly cleaned, water use is not properly managed, problems are not identified or necessary repairs not performed, the roof catchment system will cease to provide reliable and good quality water.

Following is a time table of maintenance and management requirements that can provide a basis for monitoring and checking:

- a) During the rainy season, the whole system (roof catchment, gutters, pipes, screens, first-

flush and overflow) should be checked before and after each rain and preferably cleaned after every dry period exceeding a month.

- b) At the end of the dry season and just before the first shower of rain is anticipated, the storage tank should be scrubbed and flushed of all sediment and debris (the tank should be refilled afterwards with a few centimeters of clean water to prevent cracking). Ensure timely service (before the first rains are due) of all tank fixtures, including replacement of all worn screens and servicing of the outlet tap or hand pump.

### 6.6 Water Use Management

Control over the quantity of water abstracted from the tank is important to optimize water use. Water use should be managed so that the supply is sufficient to last through the dry season. Failure to do so will mean exhausting all the stored water. On the other hand, underutilization of the water source due to severe rationing should also be avoided.

## 7 RECHARGE OF HARVESTED RAINWATER IN AQUIFERS

**7.0** The runoff water collected from roof tops can artificially recharge and augment the depleting ground water resources especially in the urban areas, where the natural recharge has diminished considerably. The areas having depth to water table greater than 8 m below ground level and underlain by permeable strata are suitable for artificial recharge.

### 7.1 Design of Efficient Artificial Recharge Structures

The design involves consideration of data on hydrological and hydrogeological aspects and hydrometeorological parameters. The background information to be collected is as given below:

- a) Layout plan of the area.
- b) Demarcation of the roof, paved and open areas.
- c) Delineation of storm water drains and flow of storm water.
- d) Details of the existing ground water abstraction structures in and around the vicinity of the project site.
- e) Computation of the runoff for recharge.

Apart from the above mentioned parameters, selection of appropriate recharge structure depends on the availability of space for construction of recharge structures and invert levels of storm water drains at inlets to recharge structures. While preparing the

recharge scheme, depth and shape of the storage facility in recharge structure depends on the availability of runoff, depth of storm water drainage and space availability in an area. The recharge scheme as prepared may also be got vetted by appropriate authorities and experts to incorporate suggestions for improvement.

### 7.2 Recharge Structures

The most suitable recharge structures for roof top rain water harvesting are:

- a) Recharge pits;
- b) Recharge trenches;
- c) Recharge through dry or operational dugwells;
- d) Recharge through abandoned/existing tube wells; and
- e) Recharge wells, etc.

#### 7.2.1 Recharge Pits

- a) In alluvial areas where permeable rocks are exposed on the land surface or at very shallow depth, recharge pits are suitable for artificial recharge of water collected from the roof tops.
- b) The technique is suitable for buildings having a roof area of 100 m<sup>2</sup>. The recharge pits are constructed for recharging the shallow aquifers.
- c) Recharge pits may be of any shape and size and are generally constructed 1 to 2 m wide and 2 to 3 m deep which are backfilled with boulders (5-20 cm), gravels (5-10 mm), and coarse sand (1.5-2 mm) in graded form — boulders at the bottom, gravels in between and coarse sand at the top so that the silt content that will come with runoff will be deposited on the top of the coarse sand layer and can easily be removed. For smaller roof area, pit may be filled with broken bricks/cobbles.
- d) A mesh should be provided at the roof so that leaves or any other solid waste/debris are prevented from entering the pit and a desilting/ collection chamber may also be provided at the ground to arrest the flow of finer particles to the recharge pit.
- e) The top layer of sand should be cleaned periodically to maintain the recharge rate.

#### 7.2.2 Recharge Trenches

- a) Recharge trenches are suitable for buildings having roof area of 200-300 m<sup>2</sup> and where permeable strata is available at shallow depths.
- b) Trench may be 0.5 to 1 m wide, 1 to 1.5 m

- deep and 10 to 20 m long depending upon availability of water to be recharged.
- These are backfilled with boulders (5-20 cm), gravels (5-10 mm), and coarse sand (1.5-2 mm) in graded form — boulders at the bottom, gravel in between and coarse sand at the top so that the silt content that will come with runoff will be deposited on the top of the sand layer and can easily be removed.
  - A mesh should be provided at the roof so that leaves or any other solid waste/debris is prevented from entering the trench and a desilting/collection chamber may also be provided on ground to arrest the flow of finer particles to the trench.
  - The top layer of sand should be cleaned periodically to maintain the recharge rate.
- Recharge water should be silt-free. For removing the silt content, the runoff water should pass either through a desilting chamber or filter chamber.
  - Periodic chlorination should be done for controlling the bacteriological contamination in operational dug well.
  - Wire mesh filter should be provided just before the inlet to avoid entry of any foreign material, tree leaves, etc, in to the dug well.

#### 7.2.4 Recharge Through Abandoned/Existing Tube Wells (see Fig. 5 and Fig. 6)

#### 7.2.3 Recharge Through Dry or Operational Dug Wells (see Fig. 4)

- Dry/operational dug wells if exist in the area may be utilized as recharge structures after cleaning and desilting the same.
  - Recharge water is guided through a pipe from desilting chamber to the bottom of the well or below the water level to avoid scouring of bottom and entrapment of air bubbles in the aquifer.
- Abandoned/existing tube wells may be used as recharge structures.
  - The abandoned tube well should be properly developed before use as recharge structure.
  - PVC pipes of 10 cm diameter are connected to roof drains to collect rainwater.
  - The first roof runoff is drained through the bottom of drain pipe if existing tube well is used as recharge structure. After closing the bottom pipe, the rainwater of subsequent rain showers is taken through a 'Tee' to an online PVC filter in case of small roofs. If the roof area is larger, a filter pit may be provided. Rainwater from roofs is taken to collection/

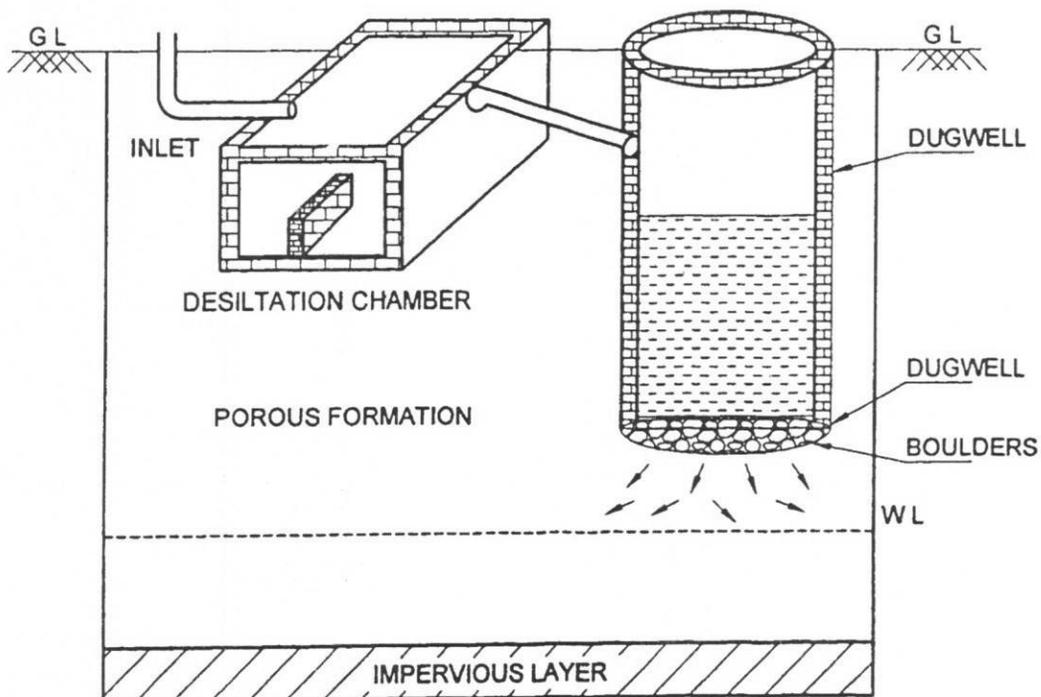


FIG. 4 RECHARGE THROUGH DUG WELL

IS 15797 : 2008

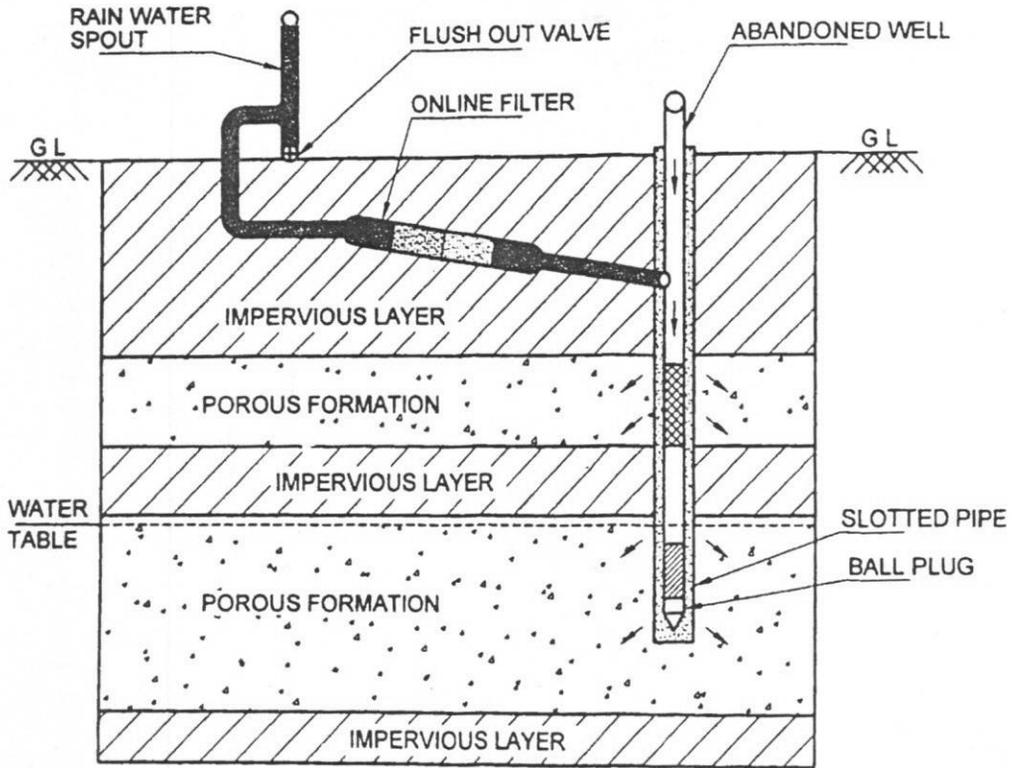


FIG. 5 RECHARGE THROUGH ABANDONED TUBE WELL

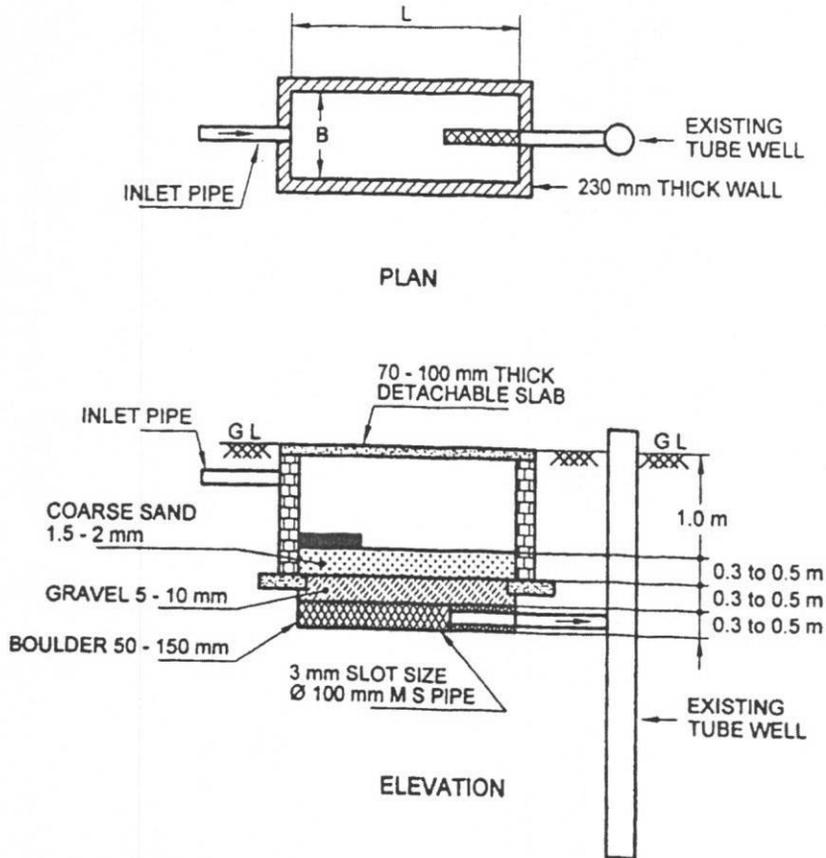


FIG. 6 RECHARGE THROUGH EXISTING TUBE WELL

desilting chambers located on ground. These collection chambers are interconnected as well as connected to the filter pit through pipes.

- e) A connecting pipe with recharge well is provided at the bottom of the pit for recharging of filtered water through well.
- f) Wire mesh filter should be provided just before the inlet to avoid entry of any foreign material, tree leaves, etc., in to the system.

#### 7.2.5 Recharge Wells (see Fig. 7)

- a) In areas where the aquifers are overlain by a considerable thickness of impervious formation, a new recharge tube well can be constructed for recharging the harvested rainwater.
- b) It is used for recharging single/multiple aquifers.
- c) A settlement-cum-storage tank is constructed near the tube well for settlement of silt particles and storage of excess water.
- d) Roof top water is diverted to the settlement tank through pipes.

- e) Clear water of storage tank is diverted to the recharge tube well for recharge.
- f) It is suitable for recharging roof top rainwater of big buildings/blocks.
- g) If runoff availability is less, then online filter may be used in the pipe line connecting roof water with recharge well.

##### 7.2.5.1 Construction of recharge well

These are drilled by deploying the appropriate rig unit or by hand boring as per the site conditions and depth of the tube wells.

A well assembly of pipes with diameters varying from 100 to 250 mm may be lowered throughout the depth. Both M.S. and PVC pipes can be used. PVC pipes are rigid, light pipes in 6 or 9 m lengths available in all diameters. The main advantage of PVC pipes is their resistance to corrosion and slots of the pipes will not close with time. As the slotted pipes in recharge wells are in fluctuation zones of water levels, slots of M.S. pipes may become closed due to rusting. The main drawback of PVC pipes is that, these pipes can not be used in large diameter recharge wells. M.S. Pipes may be coated with bituminous coating to avoid rusting.

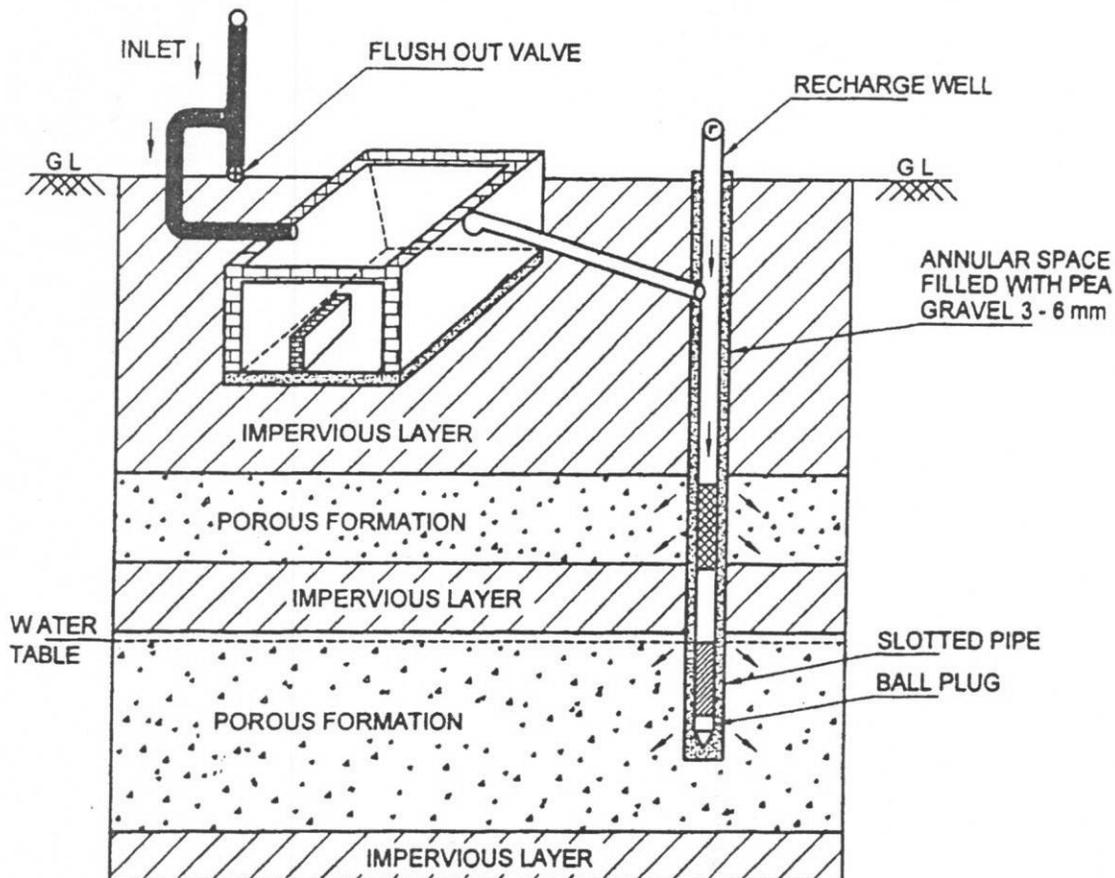


FIG. 7 RECHARGE THROUGH BORE WELL

IS 15797 : 2008

After excavation of the recharge trench/shaft or filtration chamber is over, pipes should be rechecked and cleaned with wire brush. Depth sounding of recharge wells should be taken with tape to make sure that no silt or soil has gone into the recharge wells during the excavation of trench/shaft. Width of slots in recharge well should be in accordance with the aquifer system encountered. Slotted pipes should be placed against the aquifer or dried-up aquifers encountered in the recharge wells. A slotted pipe at the top of the recharge well will need to be placed to permit the entry of clean/clear water into the recharge well.

The annular space around the well assembly may be shrouded with appropriate size of gravel. The gravel should be washed so that it is silt-free. The recharge tube well should be developed by low capacity air compressor or by bailing method as required. The well may also be cleaned and developed by pouring the water from outside if required. The water levels of the tube well should be recorded and the well covered with cap with a provision to monitor the well in future. A vent pipe of about one inch diameter is also recommended which can act as escape for gases and for measuring the water levels. Once the recharge trench or shaft is constructed around the recharge tube well, recharge wells may be developed with hand bailers to avoid the disturbance of filter media.

#### 7.2.5.2 Recharge ability test

To test the recharge ability of the tube well, a slug test may be conducted [see IS 14476 (Part 6)].

### 7.3 Filters

Generally, the following two types of filters are used :

- a) *Online Filter*
  - 1) This filter is used when availability of runoff as well as recharge rate of recharge well is less.
  - 2) Manufactured from reinforced engineering plastic material.
  - 3) Available in various sizes and flow rates ranging from 3 to 25 m<sup>3</sup>/h.
  - 4) Easy to open and clean.
- b) *Purpose Built Filter*
  - 1) The filter material recommended is coarse sand of 1.5 to 2 mm size at the top, followed by gravel of 5 to 10 mm size, and boulders of 5 to 20 cm at bottom. The thickness of each layer should be about 0.5 m. Coarse sand should be placed at the top so that the silt content that comes with runoff will be deposited on the top of the coarse sand/

pea gravel and can easily be removed. For smaller roof area the pit may be filled with overburnt broken bricks/cobbles.

- 2) After excavation of filter chamber, boulders and gravel should be filled up first to the foundation of wall of the structure.
- 3) After filling of boulder and gravel, filter material should be covered with polythene/jute bags to avoid spilling of construction material, which may damage the filter bed. After the construction of walls, the polythene/jute bags should be removed and the sand/pea gravels filled up to the recommended depth as per the design.
- 4) Filter media should be free from silt and any other foreign material. Before putting the filter material into the chamber, filter material should be sieved and washed to remove all the finer material. During operation the scouring effect of flow of water into the structure should be checked upon and if flow is disturbing the filter media, the water can be released near the filter media. This can be done by providing an 'I' shape joint in the inlet pipe in trench.
- 5) Regular inspection of filter material is essential in recharge structures. Silt deposited on the filter media should be cleaned regularly. Once in a year the top 5-10 cm sand/pea gravel layer should also be scraped to maintain a constant recharge rate through filter material.
- 6) Growth of grass or bushes hampers the filtration rate of the chamber. The grass and bushes should be cleared regularly.

### 7.4 Maintenance of Catchment Area, Water Drains and Recharge Structures

- a) The catchments should be neat and clean. The roof top/terrace of the building spaces around the buildings should not be used for dumping of unwanted items and scrap material.
- b) The washing machine water having heavy dose of detergents should not be allowed to enter into the water drains which are connected with recharge structures.
- c) Open water drains covered with perforated detachable RCC slabs are best as the maintenance of these drains is easy and pollution, especially bacteriological pollution, can be avoided. If the storm water drainage is through pipe system, provide manholes and

- chambers at regular intervals as well as close to the suspected silt and waste accumulation places within the channel.
- d) Protect the drainage system from tree leaves, polythene bags, plastic bottles and pouches of eatables.
  - e) Put up sign boards mentioning that the campus of building is equipped with rainwater harvesting system which is being recharged to the ground water system. Mention the ill effects and health impacts if the storm water drains are not properly maintained. Educate the staff maintaining the storm water drains to keep the drains neat and clean.
  - f) Provide wire mesh filter just before the inlet. Provide silt check wall within the drain bed at a convenient place. If more silt is expected provide check wall at regular intervals in the storm water drains.
  - g) The periodic removal of the material deposited on the surface be done by scraping
- h) the silt accumulated on top of the filter bed regularly.
  - h) Precaution should be taken to avoid domestic waste water entering into the recharge structures.
  - j) Recharge tube wells should be developed periodically by hand bailers to avoid clogging of the slots.
  - k) Before the arrival of monsoon, the roof top as well as drains should be properly cleaned.
  - m) Length and placement of the slotted pipe should be finalized after drilling of pilot hole for tube well.
  - n) Recharge water should be introduced into the structure at its lowest point to prevent erosion and disturbance of filter material.
  - p) A wire mesh should be placed at the entrance of recharge structures.
  - q) Periodic cleaning of collection chambers should be carried out to remove the plastic bags, leaves, etc, which may choke the entry of water recharge structures.

## ANNEX A

### (Foreword)

#### COMMITTEE COMPOSITION

##### Ground Water and Related Investigations Sectional Committee, WRD 3

| <i>Organization</i>  | <i>Representative(s)</i>  |
|--|---|
| Central Ground Water Board, New Delhi                          | SHRI B. M. JHA ( <i>Chairman</i> ) [Member (SAM)]                               |
| Central Electricity Authority, Hyderabad                       | SHRI MAJOR SINGH<br>SHRI S. B. ATRI ( <i>Alternate</i> )                        |
| Central Ground Water Board, Faridabad                          | DR S. K. JAIN<br>SHRI S. K. SINHA ( <i>Alternate</i> )                          |
| Central Pollution Control Board, New Delhi                     | DR R. C. TRIVEDI<br>DR SANJEEV AGRAWAL ( <i>Alternate</i> )                     |
| Central Soil and Salinity Research Institute, Karnal           | DR S. K. GUPTA  |
| Central Water & Power Research Station, Pune                   | DR N. GHOSH<br>SHRI R.S. RAMTEKA ( <i>Alternate</i> )                           |
| Central Water Commission, Faridabad                            | SUPERINTENDING ENGINEER (PLANNING CIRCLE)<br>DIRECTOR (WM) ( <i>Alternate</i> ) |
| Centre for Water Resources Development & Management, Kozhikode | HEAD<br>DR E. J. JAMES ( <i>Alternate</i> )                                     |
| Geological Survey of India, Lucknow                            | SHRI S. KUMAR<br>SHRI Y. DEVA ( <i>Alternate</i> )                              |
| Ground Water Surveys and Development Agency, Pune              | DR B. S. CHANDRASEKHAR<br>SHRI S. P. BAGDE ( <i>Alternate</i> )                 |

IS 15797 : 2008

| <i>Organization</i>   | <i>Representative(s)</i>  |
|---|---|
| Gujarat Water Resources Development Corporation, Gujarat        | SHRI J. P. RAVAL<br>SHRI A. D. GOHIL ( <i>Alternate</i> )                                 |
| India Meteorological Department, New Delhi                      | SHRI N. Y. APTE   |
| Indian Institute of Technology, Roorkee                         | DR DEEPAK KHARE   |
| Irrigation Department, Government of Punjab, Chandigarh         | CHIEF ENGINEER<br>DIRECTOR ( <i>Alternate</i> )   |
| Irrigation Department, Government of Uttarakhand, Dehra Dun     | CHIEF ENGINEER<br>SUPERINTENDING ENGINEER (I & PI) ( <i>Alternate</i> )                   |
| Ministry of Environment & Forests, New Delhi                    | ADVISOR<br>DR (SMT) NALINI BHAT ( <i>Alternate</i> )                                      |
| National Bureau of Soil Survey & Land Use Planning, New Delhi   | DIRECTOR  |
| National Geophysical Research Institute, Hyderabad              | DR D. MURALIDHARAN  |
| National Hydroelectric Power Corporation Ltd, Faridabad         | SHRI IMRAN SAYEED<br>SHRI P. PUNETHA ( <i>Alternate</i> )                                 |
| National Institute of Hydrology, Roorkee                        | DR A. K. BHAR<br>DR N. C. GHOSH ( <i>Alternate</i> )                                      |
| National Remote Sensing Agency, Hyderabad                       | HEAD, HYDKO GEOLOGY DIVISION  |
| North Eastern Region, Tejpur                                    | DR P. V. SEETHAPATHI<br>DR S. C. PATRA ( <i>Alternate</i> )                               |
| River Research Institute, Government of West Bengal, Kolkata    | SHRI R. CHAKRABORTY   |
| Survey of India, New Delhi                                      | BRIG G. S. CHANDELA<br>SHRI C. B. SINGH ( <i>Alternate</i> )                              |
| Water & Land Management Institute, Aurangabad                   | DR B. M. SAHNI<br>SHRI B. B. JADIA ( <i>Alternate</i> )                                   |
| Water Technology Centre for Eastern Region, Orissa, Bhubaneswar | SHRI R. C. SRIVASTAVA   |
| BIS Directorate General   | SHRI A. M. DAVID, Director (WRD)<br>[Representing Director General ( <i>Ex-officio</i> )] |

*Member Secretary*  
Ms BHAVANA SHARMA  
Assistant Director (WRD), BIS

### Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

### Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

### Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. WRD 3 (369).

### Amendments Issued Since Publication

| Amend No. | Date of Issue | Text Affected |
|-----------|---------------|---------------|
|           |               |               |
|           |               |               |
|           |               |               |

### BUREAU OF INDIAN STANDARDS

#### Headquarters :

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002  
Telephones : 2323 0131, 2323 3375, 2323 9402

Telegrams : Manaksanstha  
(Common to all offices)

#### Regional Offices :

|  | Telephone                                      |
|--|--|
| Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg<br>NEW DELHI 110 002   | { 2323 7617<br>2323 3841                       |
| Eastern : 1/14 C.I.T. Scheme VII M, V. I. P. Road, Kankurgachi<br>KOLKATA 700 054  | { 2337 8499, 2337 8561<br>2337 8626, 2337 9120 |
| Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022  | { 260 3843<br>260 9285                         |
| Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600 113   | { 2254 1216, 2254 1442<br>2254 2519, 2254 2315 |
| Western : Manakalaya, E9 MIDC, Marol, Andheri (East)<br>MUMBAI 400 093   | { 2832 9295, 2832 7858<br>2832 7891, 2832 7892 |
| Branches : AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD.<br>GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR.<br>PARWANOO. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISAKHAPATNAM. |  |